

A World Bank Group Flagship Report



Doing Business 2018

Reforming to Create Jobs



Comparing Business Regulation
for Domestic Firms in **190** Economies

Economy Profile of Taiwan, China

*Doing Business 2018 Indicators
(in order of appearance in the document)*

Starting a business	Procedures, time, cost and paid-in minimum capital to start a limited liability company
Dealing with construction permits	Procedures, time and cost to complete all formalities to build a warehouse and the quality control and safety mechanisms in the construction permitting system
Getting electricity	Procedures, time and cost to get connected to the electrical grid, the reliability of the electricity supply and the transparency of tariffs
Registering property	Procedures, time and cost to transfer a property and the quality of the land administration system
Getting credit	Movable collateral laws and credit information systems
Protecting minority investors	Minority shareholders' rights in related-party transactions and in corporate governance
Paying taxes	Payments, time and total tax rate for a firm to comply with all tax regulations as well as post-filing processes
Trading across borders	Time and cost to export the product of comparative advantage and import auto parts
Enforcing contracts	Time and cost to resolve a commercial dispute and the quality of judicial processes
Resolving insolvency	Time, cost, outcome and recovery rate for a commercial insolvency and the strength of the legal framework for insolvency
Labor market regulation	Flexibility in employment regulation and aspects of job quality

About Doing Business

The Doing Business project provides objective measures of business regulations and their enforcement across 190 economies and selected cities at the subnational and regional level.

The Doing Business project, launched in 2002, looks at domestic small and medium-size companies and measures the regulations applying to them through their life cycle.

Doing Business captures several important dimensions of the regulatory environment as it applies to local firms. It provides quantitative indicators on regulation for starting a business, dealing with construction permits, getting electricity, registering property, getting credit, protecting minority investors, paying taxes, trading across borders, enforcing contracts and resolving insolvency. Doing Business also measures features of labor market regulation. Although Doing Business does not present rankings of economies on the labor market regulation indicators or include the topic in the aggregate distance to frontier score or ranking on the ease of doing business, it does present the data for these indicators.


By gathering and analyzing comprehensive quantitative data to compare business regulation environments across economies and over time, Doing Business encourages economies to compete towards more efficient regulation; offers measurable benchmarks for reform; and serves as a resource for academics, journalists, private sector researchers and others interested in the business climate of each economy.

In addition, Doing Business offers detailed [subnational reports](#), which exhaustively cover business regulation and reform in different cities and regions within a nation. These reports provide data on the ease of doing business, rank each location, and recommend reforms to improve performance in each of the indicator areas. Selected cities can compare their business regulations with other cities in the economy or region and with the 190 economies that Doing Business has ranked.


The first Doing Business report, published in 2003, covered 5 indicator sets and 133 economies. This year's report covers 11 indicator sets and 190 economies. Most indicator sets refer to a case scenario in the largest business city of each economy, except for 11 economies that have a population of more than 100 million as of 2013 (Bangladesh, Brazil, China, India, Indonesia, Japan, Mexico, Nigeria, Pakistan, the Russian Federation and the United States) where Doing Business, also collected data for the second largest business city. The data for these 11 economies are a population-weighted average for the 2 largest business cities. The project has benefited from feedback from governments, academics, practitioners and reviewers. The initial goal remains: to provide an objective basis for understanding and improving the regulatory environment for business around the world.

The distance to frontier (DTF) measure shows the distance of each economy to the "frontier," which represents the best performance observed on each of the indicators across all economies in the Doing Business sample since 2005. An economy's distance to frontier is reflected on a scale from 0 to 100, where 0 represents the lowest performance and 100 represents the frontier. The ease of doing business ranking ranges from 1 to 190. The ranking of 190 economies is determined by sorting the aggregate distance to frontier scores, rounded to two decimals.


More about [Doing Business](#) (PDF, 5MB)

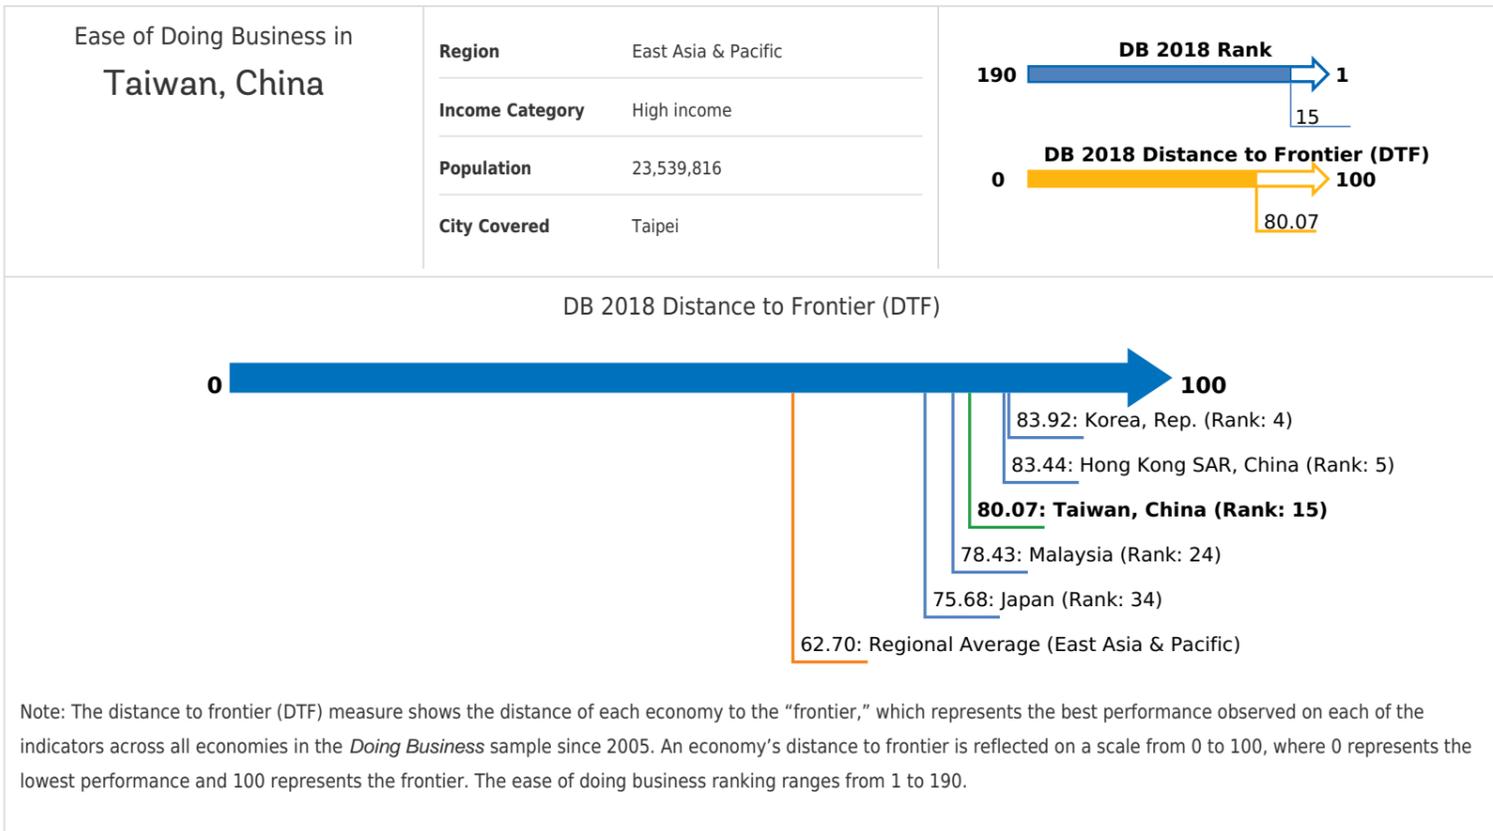

Rankings on Doing Business topics - Taiwan, China

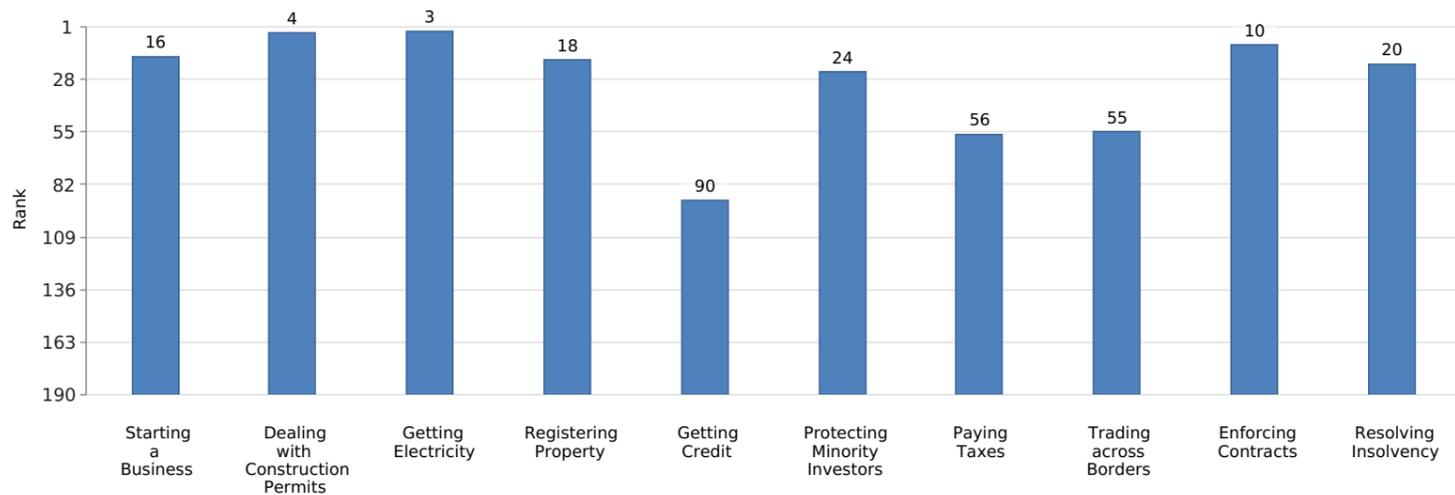

Distance to Frontier (DTF) on Doing Business topics - Taiwan, China

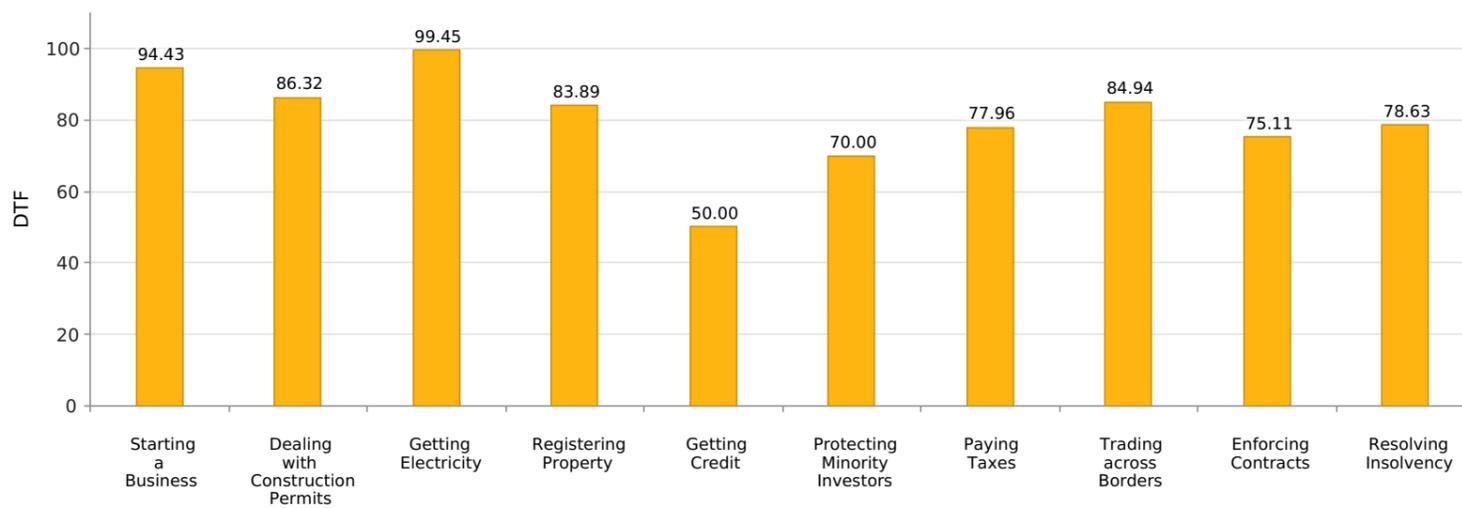

Starting a Business

This topic measures the paid-in minimum capital requirement, number of procedures, time and cost for a small- to medium-sized limited liability company to start up and formally operate in economy's largest business city.

To make the data comparable across 190 economies, Doing Business uses a standardized business that is 100% domestically owned, has start-up capital equivalent to 10 times income per capita, engages in general industrial or commercial activities and employs between 10 and 50 people one month after the commencement of operations, all of whom are domestic nationals. Starting a Business considers two types of local limited liability companies that are identical in all aspects, except that one company is owned by 5 married women and the other by 5 married men. The distance to frontier score for each indicator is the average of the scores obtained for each of the component indicators.

The most recent round of data collection for the project was completed in June 2017. [See the methodology for more information.](#)

What the indicators measure	Case study assumptions
<p>Procedures to legally build a warehouse (number)</p>	<p>To make the data comparable across economies, several assumptions about the business and the procedures are used. It is assumed that any required information is readily available and that the entrepreneur will pay no bribes.</p>
<ul style="list-style-type: none"> Submitting all relevant documents and obtaining all necessary clearances, licenses, permits and certificates Submitting all required notifications and receiving all necessary inspections Obtaining utility connections for water and sewerage Registering and selling the warehouse after its completion 	<p>The business:</p> <ul style="list-style-type: none"> - Is a limited liability company (or its legal equivalent). If there is more than one type of limited liability company in the economy, the most common among domestic firms is chosen. Information on the most common form is obtained from incorporation lawyers or the statistical office. - Operates in the economy's largest business city and the entire office space is approximately 929 square meters (10,000 square feet). For 11 economies the data are also collected for the second largest business city. - Is 100% domestically owned and has five owners, none of whom is a legal entity; and has a start-up capital of 10 times income per capita and has a turnover of at least 100 times income per capita. - Performs general industrial or commercial activities, such as the production or sale of goods or services to the public. The business does not perform foreign trade activities and does not handle products subject to a special tax regime, for example, liquor or tobacco. It does not use heavily polluting production processes. - Leases the commercial plant or offices and is not a proprietor of real estate and the amount of the annual lease for the office space is equivalent to 1 times income per capita. - Does not qualify for investment incentives or any special benefits. - Has at least 10 and up to 50 employees one month after the commencement of operations, all of whom are domestic nationals. - Has a company deed 10 pages long.
<p>Time required to complete each procedure (calendar days)</p>	<p>The owners:</p>
<ul style="list-style-type: none"> Does not include time spent gathering information Each procedure starts on a separate day (2 procedures cannot start on the same day) Procedures fully completed online are recorded as ½ day Procedure is considered completed once final document is received No prior contact with officials 	<ul style="list-style-type: none"> - Have reached the legal age of majority. If there is no legal age of majority, they are assumed to be 30 years old. - Are sane, competent, in good health and have no criminal record. - Are married and the marriage is monogamous and registered with the authorities. - Where the answer differs according to the legal system applicable to the woman or man in question (as may be the case in economies where there is legal plurality), the answer used will be the one that applies to the majority of the population.
<p>Cost required to complete each procedure (% of income per capita)</p>	
<ul style="list-style-type: none"> Official costs only, no bribes No professional fees unless services required by law or commonly used in practice 	
<p>Paid-in minimum capital (% of income per capita)</p>	
<ul style="list-style-type: none"> Funds deposited in a bank or with third party before registration or up to 3 months after incorporation 	


Starting a Business - Taiwan, China

Standardized Company

Legal form	Private Company Limited By Shares
Paid-in minimum capital requirement	TWD 0
City Covered	Taipei


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Procedure - Men (number)	3	7.0	4.9	1.00 (New Zealand)
Time - Men (days)	10	22.7	8.5	0.50 (New Zealand)
Cost - Men (% of income per capita)	2.0	18.4	3.1	0.00 (United Kingdom)
Procedure - Women (number)	3	7.0	4.9	1.00 (New Zealand)
Time - Women (days)	10	22.8	8.5	0.50 (New Zealand)
Cost - Women (% of income per capita)	2.0	18.4	3.1	0.00 (United Kingdom)
Paid-in min. capital (% of income per capita)	0.0	15.1	8.7	0.00 (113 Economies)

Figure - Starting a Business in Taiwan, China and comparator economies - Ranking and DTF

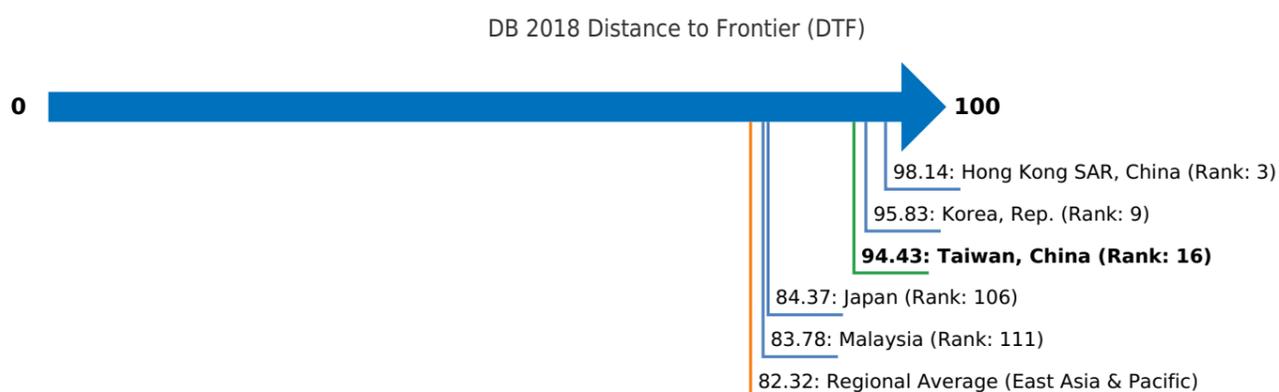

Note: The ranking of economies on the ease of starting a business is determined by sorting their distance to frontier scores for starting a business. These scores are the simple average of the distance to frontier scores for each of the component indicators.

Figure - Starting a Business in Taiwan, China - Procedure, Time and Cost

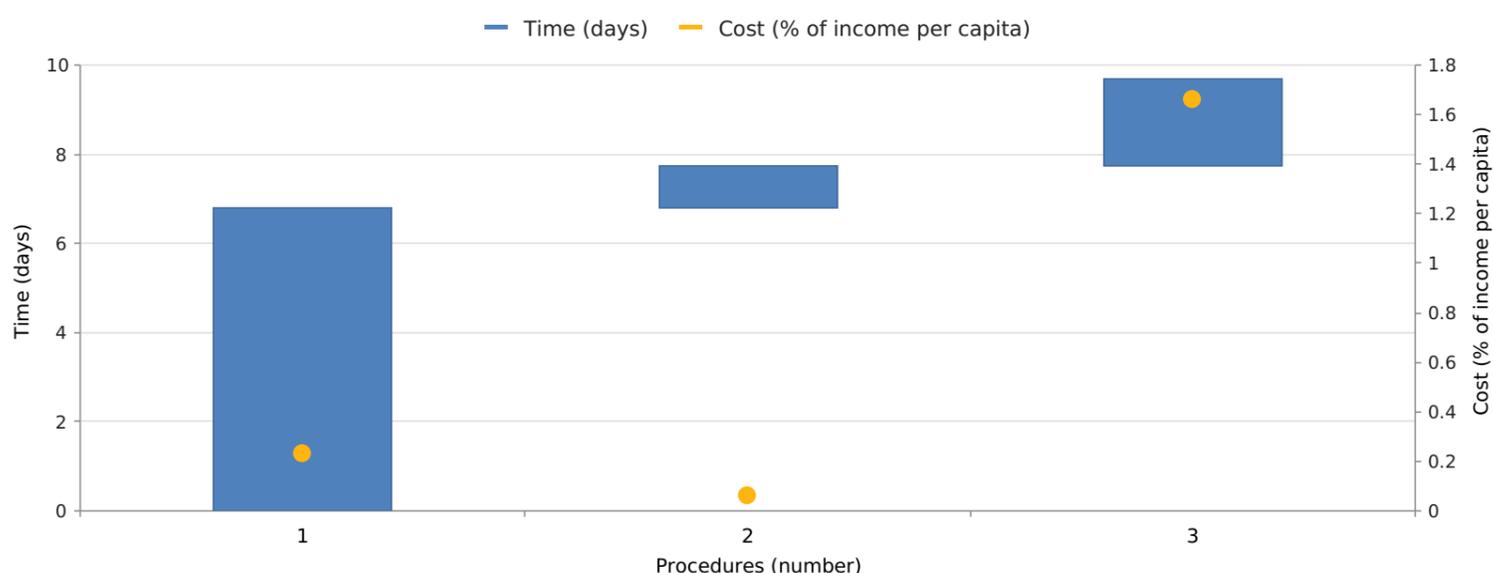

*This symbol is shown beside procedure numbers that take place simultaneously with the previous procedure.

Note: Online procedures account for 0.5 days in the total time calculation. For economies that have a different procedure list for men and women, the graph shows the time for women. For more information on methodology, see the *Doing Business* website (<http://doingbusiness.org/en/methodology>). For details on the procedures reflected here, see the summary below.

Details - Starting a Business in Taiwan, China - Procedure, Time and Cost

No.	Procedures	Time to Complete	Associated Costs
1	<p>Use the online platform to search the name, apply for incorporation and tax registration, apply for Labor Insurance, National Health Insurance and Pension Plan Report with the Bureau of Labor Insurance and register for work rules with the Council of Labor Affairs</p> <p><i>Agency</i> : Ministry of Economic Affairs (MOEA)</p> <p>The company can search the availability of the company name and check the legality of planned business online. Applications for company registration can be done via the Company and Business One-stop Service Request website (http://onestop.nat.gov.tw/oss/identity/identity/init.do). The original company registration form stamped with the seals of the company must be delivered to the registration authority. With effective from April 14, 2014, entrepreneurs can apply for company registration as well as upload the scanned and stamped company registration form using the Company and Business One-stop Service Request website using an electronic signature.</p> <p>The review period has been shortened to 2 days. Therefore the procedure now takes one day for search, reservation and application. Then the government officials are required to review the application on the second day. At the end of the second day, (if approved) the approval is ready, and the applicant can pick it up from the Ministry of Economic Affairs (MOEA). Otherwise, it is mailed to the applicant, in which case it takes up to four days to receive the confirmation.</p> <p>The articles of incorporation for a private limited company must include the company name, business purpose, shareholders' contributions, profit-allocation ratio, location of offices, number and names of directors, manner of issuing public announcements, and the date the articles of incorporation were adopted.</p> <p>The application for a taxpayer's identification number is done at the same time. The Labor Insurance Bureau now adopts a three-in-one consolidation application (i.e., the labor insurance application, national health insurance application and the pension plan appropriation application), so the Labor Insurance Bureau and National Health Insurance Bureau can now review and process the application at the same time, if all in order, the Bureau can grant the application in 5 - 7 business days. All firms may apply for national health insurance (NHI) regardless of the number of employees, but only companies with five or more employees may apply for labor insurance (LI) (Article 6 of Labor Insurance Act). National health insurance, labor insurance, and the pension plan report can be filed with one consolidated form.</p> <p>Forms can be downloaded from the Bureau of Labor Insurance Web site.</p> <p>In order to promote the public to use the online website to start a company, on January 16 2013, MOEA announced that companies that file their applications and submit required documents via on-line registration shall have a reduction of NTD 300 on their registration fees.</p>	7 days	TWD 150 (online search) or TWD 300 (government fee) + 0.025% of capital (in case the registration fee payable is less than TWD 1,000, the registration fee shall be TWD 1,000)

2	<p>Make a company seal <i>Agency</i> : Seal maker Company registration documents and deeds are sealed (chopped). A set of company seals are commonly prepared for registration, including the name of the company, and name of the chairperson of the board of directors. These seals are required to be used for future company updates. Since May 2012, the applicant may prepare such document in the form of electronic documents prefixed electronic signature to transmit the application package via One-Stop-Shop Online Application Website electronic mail. Therefore the applicants still need making seals for registration documents, but they can use electronic signature to transmit these documents via online website.</p>	1 day	TWD 450 (depending on the number/ material used, each range from TWD 450 to TWD 1000)
3	<p>Submit a CPA audit report showing that the amount of capital invested is sufficient to cover company establishment cost <i>Agency</i> : Ministry of Economic Affairs (MOEA) In place of showing the invested capital will cover the costs of establishing a company to the Ministry of Economic Affairs; entrepreneurs submit a CPA audit report showing the invested capital has been fully paid pursuant to Article 7 of Regulations Governing Certification of Capital upon Registration Applications of Companies (last amended on June 25, 2013). In addition, Section 1 of Article 7 of Company Act (last amended on January 4, 2012) allows a company to attach an auditing certificate from an independent certified public accountant within 30 days after the registration of incorporation. Entrepreneurs can submit the audit report via the One-Stop-Shop online system using an electronic signature.</p>	2 days	TWD 5,000 - 20,000 fee varies across firms

→ Takes place simultaneously with previous procedure.

Dealing with Construction Permits

This topic tracks the procedures, time and cost to build a warehouse—including obtaining necessary the licenses and permits, submitting all required notifications, requesting and receiving all necessary inspections and obtaining utility connections. In addition, the Dealing with Construction Permits indicator measures the building quality control index, evaluating the quality of building regulations, the strength of quality control and safety mechanisms, liability and insurance regimes, and professional certification requirements. The most recent round of data collection was completed in June 2017. [See the methodology for more information](#)

What the indicators measure	Case study assumptions
<p>Procedures to legally build a warehouse (number)</p> <ul style="list-style-type: none"> Submitting all relevant documents and obtaining all necessary clearances, licenses, permits and certificates Submitting all required notifications and receiving all necessary inspections Obtaining utility connections for water and sewerage Registering and selling the warehouse after its completion 	<p>To make the data comparable across economies, several assumptions about the construction company, the warehouse project and the utility connections are used.</p>
<p>Time required to complete each procedure (calendar days)</p> <ul style="list-style-type: none"> Does not include time spent gathering information Each procedure starts on a separate day—though procedures that can be fully completed online are an exception to this rule Procedure is considered completed once final document is received No prior contact with officials 	<p>The construction company (BuildCo):</p> <ul style="list-style-type: none"> - Is a limited liability company (or its legal equivalent) and operates in the economy's largest business city. For 11 economies the data are also collected for the second largest business city. - Is 100% domestically and privately owned; has five owners, none of whom is a legal entity. Has a licensed architect and a licensed engineer, both registered with the local association of architects or engineers. BuildCo is not assumed to have any other employees who are technical or licensed experts, such as geological or topographical experts. - Owns the land on which the warehouse will be built and will sell the warehouse upon its completion.
<p>Cost required to complete each procedure (% of income per capita)</p> <ul style="list-style-type: none"> Official costs only, no bribes 	<p>The warehouse:</p> <ul style="list-style-type: none"> - Will be used for general storage activities, such as storage of books or stationery. - Will have two stories, both above ground, with a total constructed area of approximately 1,300.6 square meters (14,000 square feet). Each floor will be 3 meters (9 feet, 10 inches) high and will be located on a land plot of approximately 929 square meters (10,000 square feet) that is 100% owned by BuildCo, and the warehouse is valued at 50 times income per capita. - Will have complete architectural and technical plans prepared by a licensed architect. If preparation of the plans requires such steps as obtaining further documentation or getting prior approvals from external agencies, these are counted as procedures. - Will take 30 weeks to construct (excluding all delays due to administrative and regulatory requirements).
<p>Building quality control index (0-15)</p> <ul style="list-style-type: none"> Sum of the scores of six component indices: Quality of building regulations (0-2) Quality control before construction (0-1) Quality control during construction (0-3) Quality control after construction (0-3) Liability and insurance regimes (0-2) Professional certifications (0-4) 	<p>The water and sewerage connections:</p> <ul style="list-style-type: none"> - Will be 150 meters (492 feet) from the existing water source and sewer tap. If there is no water delivery infrastructure in the economy, a borehole will be dug. If there is no sewerage infrastructure, a septic tank in the smallest size available will be installed or built. - Will have an average water use of 662 liters (175 gallons) a day and an average wastewater flow of 568 liters (150 gallons) a day. Will have a peak water use of 1,325 liters (350 gallons) a day and a peak wastewater flow of 1,136 liters (300 gallons) a day. - Will have a constant level of water demand and wastewater flow throughout the year; will be 1 inch in diameter for the water connection and 4 inches in diameter for the sewerage connection.


Dealing with Construction Permits - Taiwan, China

Standardized Company

Estimated value of warehouse	TWD 37,638,586.00
City Covered	Taipei


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Procedures (number)	10	15.2	12.5	7.00 (Denmark)
Time (days)	93	138.2	154.6	27.5 (Korea, Rep.)
Cost (% of warehouse value)	0.4	2.2	1.6	0.10 (5 Economies)
Building quality control index (0-15)	13.0	8.9	11.4	15.00 (3 Economies)

Figure - Dealing with Construction Permits in Taiwan, China and comparator economies - Ranking and DTF

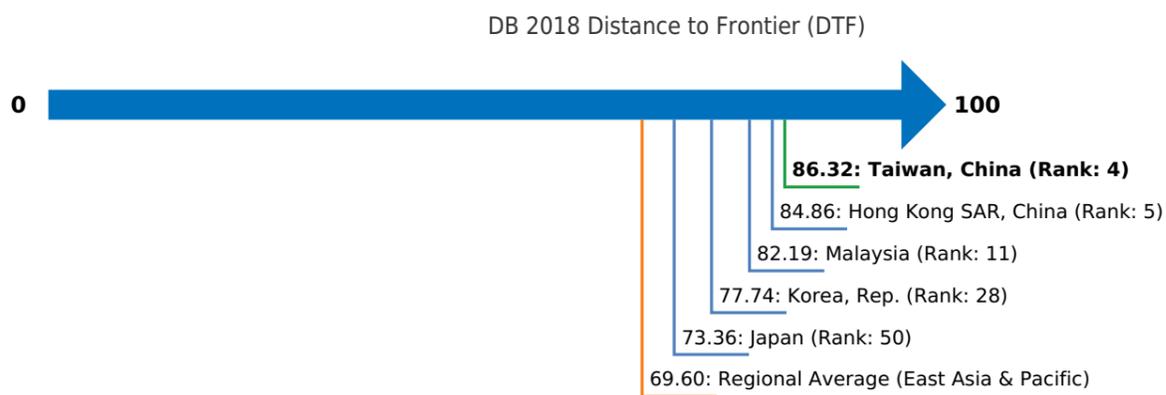

Note: The ranking of economies on the ease of dealing with construction permits is determined by sorting their distance to frontier scores for dealing with construction permits. These scores are the simple average of the distance to frontier scores for each of the component indicators.


Figure - Dealing with Construction Permits in Taiwan, China - Procedure, Time and Cost

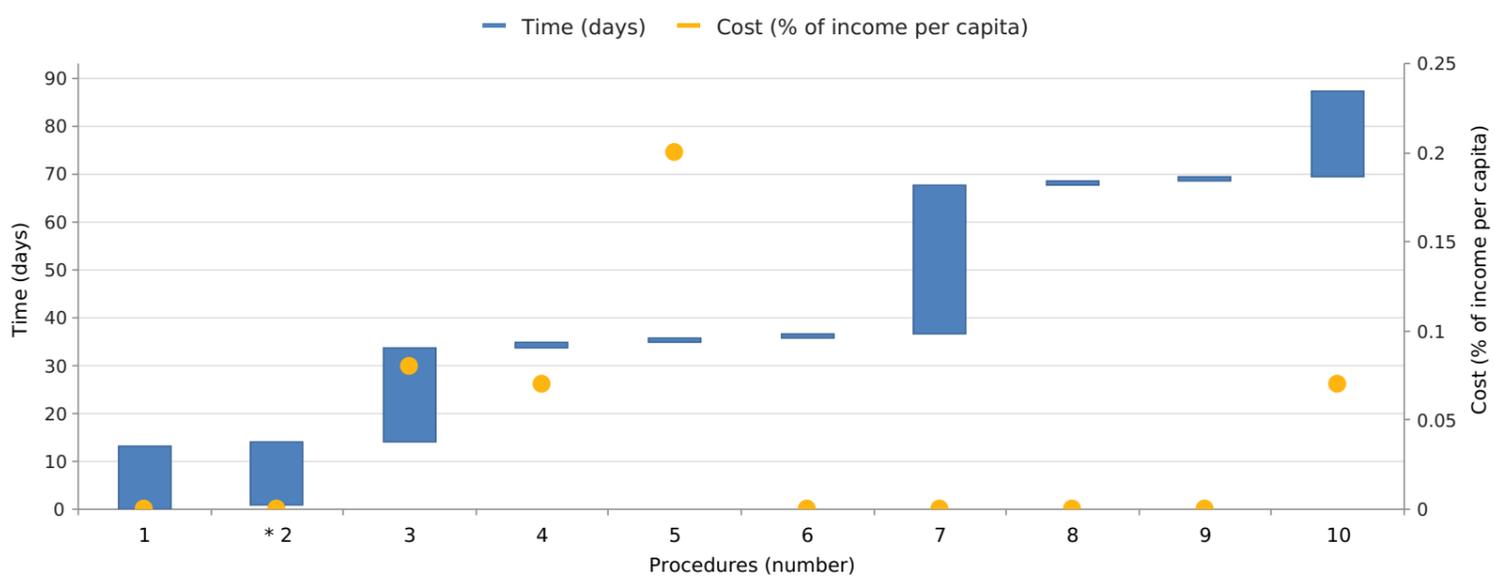

* This symbol is shown beside procedure numbers that take place simultaneously with the previous procedure.

Note: Online procedures account for 0.5 days in the total time calculation. For economies that have a different procedure list for men and women, the graph shows the time for women. For more information on methodology, see the *Doing Business* website (<http://doingbusiness.org/en/methodology>). For details on the procedures reflected here, see the summary below.

Figure - Dealing with Construction Permits in Taiwan, China and comparator economies - Measure of Quality

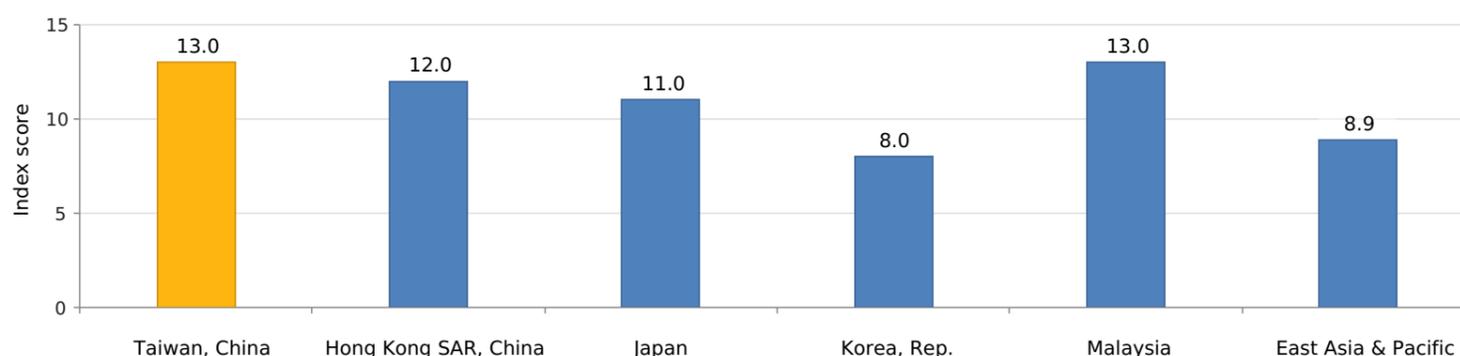

Details - Dealing with Construction Permits in Taiwan, China - Procedure, Time and Cost

No.	Procedures	Time to Complete	Associated Costs
1	<p>Obtain information about infrastructure from the water company <i>Agency</i> : Taiwan Water Corporation at One-Stop Counter BuildCo visits the One-Stop Counter to obtain information on the intended building site's water and electricity infrastructure.</p>	14 days	no charge
⇒ 2	<p>Obtain information about electricity infrastructure from electricity provider <i>Agency</i> : Taiwan Power Company (Taipower) at One-Stop Counter</p>	14 days	no charge
3	<p>Request and obtain building permit from the City Government at the One-Stop Counter <i>Agency</i> : City Government at the One-Stop Counter With the One-Stop Counter introduced in March 2011, becoming fully operational in early 2012, builders now can obtain several approvals in one place. BuildCo submits a construction permit application at the One-Stop Counter, along with the drawings and explanations as part of the "pre-construction application form."</p> <p>In particular cases, if there is a need for an application to be processed jointly with another unit, the applicant should fill out a Taipei City Government Building Permit (Design Alteration) Joint Review Form, ticking the joint processing unit and joint review item(s), and submit it once.</p> <p>If an application is not within the scope of the One-Stop Counter's jurisdiction, or is one that cannot be processed due to special circumstances, the One-Stop Counter will not be able to accept it, but will assist the applicant in going through the ordinary channels.</p> <p>If an application is within the scope of the One-Stop Counter's jurisdiction, the staff member that receives it will verify that the correct documents have been submitted, assign the application a case number, and submit a receipt stamp or fax a receipt stub with the fees that need to be paid.</p> <p>When the documents are complete, the One-Stop Counter will forward them to the relevant offices (the Construction Management Office, Bureau of High Speed Rail, Department of Rapid Transit Systems, Department of Public Works, Department of Cultural Affairs, Department of Transportation, Department of Land, Department of Urban Development, etc.) to conduct a joint review. When a joint review of an application has been conducted by the One-Stop Counter and it has been found that the application does not conform to requirements, the One-Stop Counter will notify the applicant that he has one chance to make the necessary amendments.</p> <p>Once all amendments have been made, a construction permit is issued, and fees for the construction permit, specification of building setback line, wastewater discharge permit, and land ownership certificate are paid.</p> <p>It is possible to apply for a building permit online since April 1, 2015 and the website is http://tccmoapply.dba.tcg.gov.tw:8080/tccmoapply/</p>	21 days	TWD 31,402

4	<p>Report the start date and present construction plan to the City Government at the One-Stop Counter and pay air pollution protection fee before starting construction</p> <p><i>Agency</i> : City Government at the One-Stop Counter</p> <p>After BuildCo obtains the construction permit, he prepares the application for commencement of construction, a construction plan, and other required documentation and submits them to the One-Stop Counter.</p> <p>BuildCo then pays the air pollution protection fee and obtains approval for the commencement of work.</p> <p>Under the provisions of Article 4 of the Regulations Governing Construction Project Air Pollution Prevention Facilities, the case study warehouse would be classified as a Grade 2 construction.</p>	1 day	TWD 25,674
5	<p>Request occupancy permit, post-construction approvals and registrations at the One-Stop Counter</p> <p><i>Agency</i> : City Government at the One-Stop Counter</p> <p>Where construction is completed without involving damage to adjacent property, BuildCo can take the original construction permit to the One-Stop Counter and make a one-time submission of the Self Checklist for Post-Completion Application Documents (OSC4) and apply for an occupancy permit.</p> <p>The mode of submission is the same as the construction permit application. BuildCo must place the relevant application letter, application form, drawings and explanations, and other documentation required by law or by the regulations of the unit concerned into one envelope for each separate application. BuildCo must also write the type of application and the unit concerned on the envelope (e.g., "Application to the Fire Department for post-completion inspection of fire-fighting equipment.")</p> <p>The One-Stop Counter will pass the application documents to the relevant units or review and processing. As part of the review process, the relevant departments will conduct a joint final inspection. If the building is found to be in compliance with applicable regulations, the One-Stop Counter will approve the issuance of an occupancy permit and BuildCo must pay the applicable fees. BuildCo may choose to pick up the occupancy permit in person at the One-Stop Counter or have it mailed to him. The One-Stop Counter will also notify Taipei Water Department to carry out the water connection procedures.</p> <p>Moreover, once issuance of the occupancy permit is approved, the One-Stop Counter will transmit the documentation to apply for registration of title to the local land administration office.</p> <p>For the registration of a new building, Point 3 of the Supplementary Regulations on Computing and Collecting Land Registration Fees and Penalties stipulates that the registration fee is computed according to the total cost of construction as recorded in the occupancy permit. Article 84 of the Land Registration Regulations stipulates that the general land registration procedure applies to the registration of a new building; hence the applicable registration fee is 0.2% of the total cost of construction.</p>	1 day	TWD 75,277
6	<p>Receive final inspection</p> <p><i>Agency</i> : Relevant Agencies at One-Stop Counter</p>	1 day	no charge
7	<p>Obtain occupancy permit, post-construction approvals and registrations at the One-Stop Counter</p> <p><i>Agency</i> : City Government at One-Stop Counter</p>	33 days	no charge
8	<p>Apply for water supply from a local water company</p> <p><i>Agency</i> : Taiwan Water Corporation</p>	1 day	no charge
9	<p>Receive inspection from water company</p> <p><i>Agency</i> : Taiwan Water Corporation</p>	1 day	no charge
10	<p>Obtain connection to water</p> <p><i>Agency</i> : Taiwan Water Corporation</p> <p>The whole process (from application to connection) may take 14 -- 28 days.</p>	19 days	TWD 25,000

→ Takes place simultaneously with previous procedure.

Details - Dealing with Construction Permits in Taiwan, China - Measure of Quality

	Answer	Score
Building quality control index (0-15)		13.0
Quality of building regulations index (0-2)		2.0
How accessible are building laws and regulations in your economy? (0-1)	Available online; Free of charge.	1.0
Which requirements for obtaining a building permit are clearly specified in the building regulations or on any accessible website, brochure or pamphlet? (0-1)	List of required documents; Fees to be paid; Required preapprovals.	1.0
Quality control before construction index (0-1)		1.0
Which third-party entities are required by law to verify that the building plans are in compliance with existing building regulations? (0-1)	Licensed architect.	1.0
Quality control during construction index (0-3)		2.0
What types of inspections (if any) are required by law to be carried out during construction? (0-2)	Inspections by in-house engineer.	1.0
Do legally mandated inspections occur in practice during construction? (0-1)	Mandatory inspections are always done in practice.	1.0
Quality control after construction index (0-3)		3.0
Is there a final inspection required by law to verify that the building was built in accordance with the approved plans and regulations? (0-2)	Yes, final inspection is done by government agency; Yes, in-house engineer submits report for final inspection.	2.0
Do legally mandated final inspections occur in practice? (0-1)	Final inspection always occurs in practice.	1.0
Liability and insurance regimes index (0-2)		1.0
Which parties (if any) are held liable by law for structural flaws or problems in the building once it is in use (Latent Defect Liability or Decennial Liability)? (0-1)	Professional in charge of the supervision; Construction company; Owner or investor.	1.0
Which parties (if any) are required by law to obtain an insurance policy to cover possible structural flaws or problems in the building once it is in use (Latent Defect Liability Insurance or Decennial Insurance)? (0-1)	No party is required by law to obtain insurance .	0.0
Professional certifications index (0-4)		4.0
What are the qualification requirements for the professional responsible for verifying that the architectural plans or drawings are in compliance with existing building regulations? (0-2)	Minimum number of years of experience; University degree in architecture or engineering; Being a registered architect or engineer; Passing a certification exam.	2.0

What are the qualification requirements for the professional who supervises the construction on the ground? (0-2)

Minimum number of years of experience; University degree in engineering, construction or construction management; Being a registered architect or engineer; Passing a certification exam. 2.0

⚡ Getting Electricity

This topic measures the procedures, time and cost required for a business to obtain a permanent electricity connection for a newly constructed warehouse. Additionally, the reliability of supply and transparency of tariffs index measures reliability of supply, transparency of tariffs and the price of electricity. The most recent round of data collection for the project was completed in June 2017. [See the methodology for more information.](#)

What the indicators measure

Procedures to obtain an electricity connection (number)

- Submitting all relevant documents and obtaining all necessary clearances and permits
- Completing all required notifications and receiving all necessary inspections
- Obtaining external installation works and possibly purchasing material for these works
- Concluding any necessary supply contract and obtaining final supply

Time required to complete each procedure (calendar days)

- Is at least 1 calendar day
- Each procedure starts on a separate day
- Does not include time spent gathering information
- Reflects the time spent in practice, with little follow-up and no prior contact with officials

Cost required to complete each procedure (% of income per capita)

- Official costs only, no bribes
- Value added tax excluded

The reliability of supply and transparency of tariffs index (0-8)

- Duration and frequency of power outages (0-3)
- Tools to monitor power outages (0-1)
- Tools to restore power supply (0-1)
- Regulatory monitoring of utilities' performance (0-1)
- Financial deterrents limiting outages (0-1)
- Transparency and accessibility of tariffs (0-1)

Price of electricity (cents per kilowatt-hour)*

- Price based on monthly bill for commercial warehouse in case study

*Note: Doing Business measures the price of electricity, but it is not included in the distance to frontier score nor the ranking on the ease of getting electricity.

Case study assumptions

To make the data comparable across economies, several assumptions about the construction company, the warehouse project and the utility connections are used.

The construction company (BuildCo):

- Is a limited liability company (or its legal equivalent) and operates in the economy's largest business city. For 11 economies the data are also collected for the second largest business city.
- Is 100% domestically and privately owned; has five owners, none of whom is a legal entity. Has a licensed architect and a licensed engineer, both registered with the local association of architects or engineers. BuildCo is not assumed to have any other employees who are technical or licensed experts, such as geological or topographical experts.
- Owns the land on which the warehouse will be built and will sell the warehouse upon its completion.

The warehouse:

- Will be used for general storage activities, such as storage of books or stationery.
- Will have two stories, both above ground, with a total constructed area of approximately 1,300.6 square meters (14,000 square feet). Each floor will be 3 meters (9 feet, 10 inches) high and will be located on a land plot of approximately 929 square meters (10,000 square feet) that is 100% owned by BuildCo, and the warehouse is valued at 50 times income per capita.
- Will have complete architectural and technical plans prepared by a licensed architect. If preparation of the plans requires such steps as obtaining further documentation or getting prior approvals from external agencies, these are counted as procedures.
- Will take 30 weeks to construct (excluding all delays due to administrative and regulatory requirements).

The water and sewerage connections:

- Will be 150 meters (492 feet) from the existing water source and sewer tap. If there is no water delivery infrastructure in the economy, a borehole will be dug. If there is no sewerage infrastructure, a septic tank in the smallest size available will be installed or built.
- Will have an average water use of 662 liters (175 gallons) a day and an average wastewater flow of 568 liters (150 gallons) a day. Will have a peak water use of 1,325 liters (350 gallons) a day and a peak wastewater flow of 1,136 liters (300 gallons) a day.
- Will have a constant level of water demand and wastewater flow throughout the year; will be 1 inch in diameter for the water connection and 4 inches in diameter for the sewerage connection.


Getting Electricity - Taiwan, China

Standardized Company

Price of electricity (US cents per kWh)	10.9
Name of utility	Taiwan Power Company
City Covered	Taipei


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Procedures (number)	3	4.5	4.7	2 (United Arab Emirates)
Time (days)	22	71.6	79.1	10 (United Arab Emirates)
Cost (% of income per capita)	38.9	712.0	63.0	0.00 (Japan)
Reliability of supply and transparency of tariff index (0-8)	8	3.7	7.4	8.00 (28 Economies)

Figure - Getting Electricity in Taiwan, China and comparator economies - Ranking and DTF

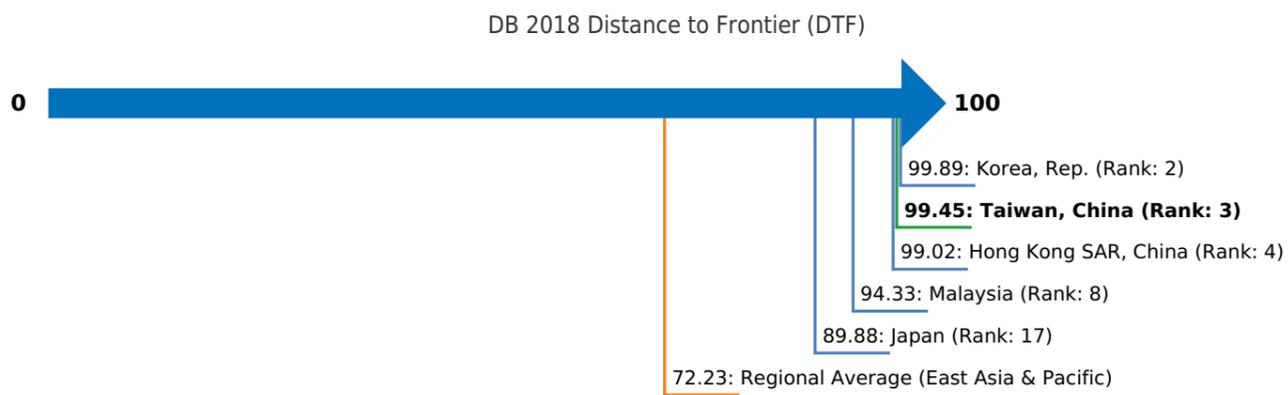

Note: The ranking of economies on the ease of getting electricity is determined by sorting their distance to frontier scores for getting electricity. These scores are the simple average of the distance to frontier scores for each of the component indicators.


Figure - Getting Electricity in Taiwan, China - Procedure, Time and Cost

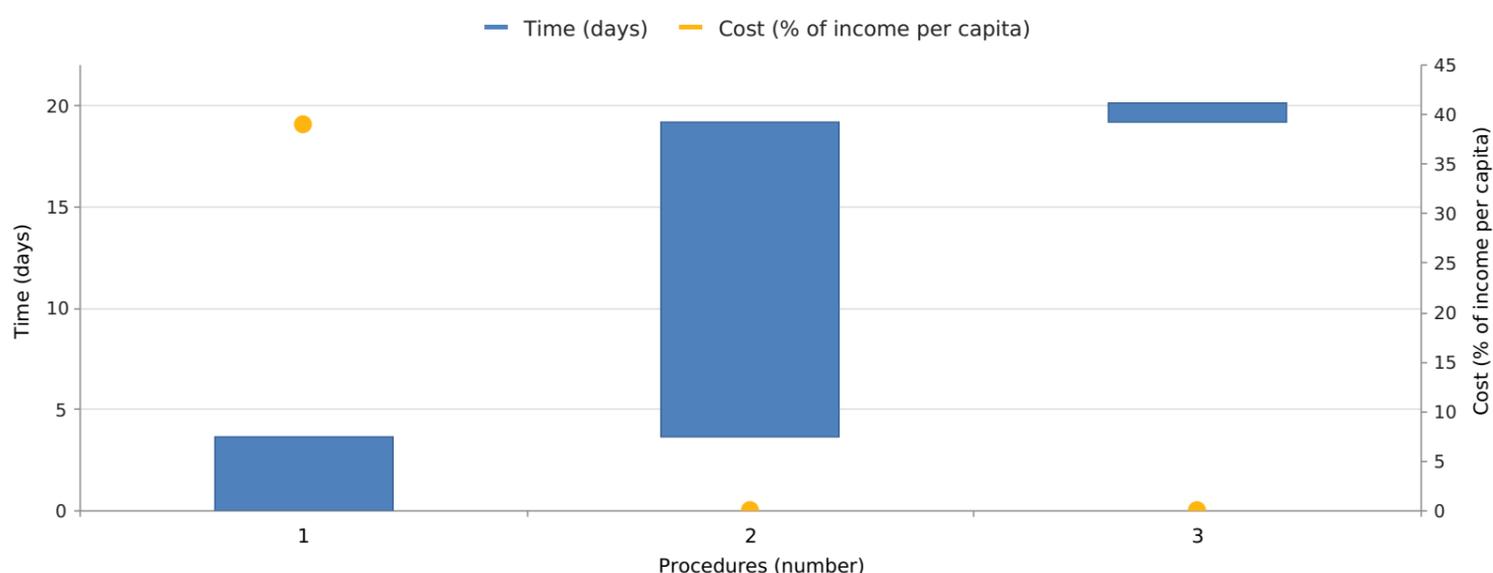

*This symbol is shown beside procedure numbers that take place simultaneously with the previous procedure.

Note: Online procedures account for 0.5 days in the total time calculation. For economies that have a different procedure list for men and women, the graph shows the time for women. For more information on methodology, see the *Doing Business* website (<http://doingbusiness.org/en/methodology>). For details on the procedures reflected here, see the summary below.

Figure - Getting Electricity in Taiwan, China and comparator economies - Measure of Quality

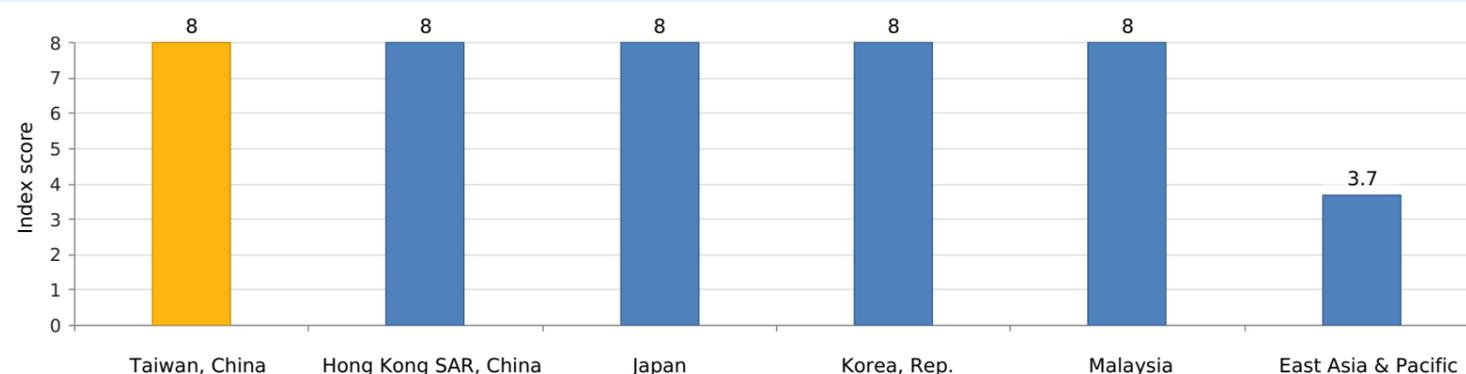

Details - Getting Electricity in Taiwan, China - Procedure, Time and Cost

No.	Procedures	Time to Complete	Associated Costs
1	<p>Submit application for connection and await completion of design <i>Agency</i> : Taiwan Power Company (TPC) The customer fills out an application form and sends it to (or takes it to) TPC's branch and pays the fee for connection. The following documents are required: Application form, an indoors wires diagram, and the usage license or certificate approved by authorities of building. TPC will then design the external line.</p> <p>Before the external connection works can start the utility has to finish the design for the works. In this case, when the customer submits an application at a TPC branch, TPC will estimate the customer's Contribution in Aid of Construction Costs. The customer can pay the fee when they apply.</p> <p>The Customer's Contribution in Aid of Construction Costs includes fees for the power line design, construction, meter installation and check of the internal wiring, and labor costs.</p>	4 calendar days	TWD 293,202
2	<p>Await completion of external works by TPC's subcontractor <i>Agency</i> : Taiwan Power Company (TPC) The contractor hired by the utility will complete the external connection work. All material is available in more than 50% of the cases. The customer doesn't have to buy any material for the external connection works.</p> <p>The excavation permit is obtained by the utility. It is obtained from the agency of the government that is in charge of the roads.</p>	17 calendar days	TWD 0

3	Await meter installation, internal wiring inspection and electricity flow from TPC <i>Agency : Taiwan Power Company (TPC)</i> The electrician who did the internal wiring submits a signed notification to the utility upon completion in which they guarantee it has been carried out according to the regulations. Then TPC will inspect the internal wiring after the external connection works are over. According to Article 43 of "The Electricity Act", "the installation of user electricity devices by electricity enterprises shall comply with relevant regulations provided by the central competent authority and electricity supply may only be connected after said devices have passed inspection. For electricity equipment already installed by the user, inspection shall be carried out with the result thereof recorded at least once every three years. In the event that non-conformity is found, a time period shall be specified for the user to make rectification." Taipower inspects the internal wiring and installs the meter after the external connection works are over. If the internal wiring check is passed, the meter will be installed and the electricity will start flowing.	1 calendar day	TWD 0
---	--	----------------	-------

→ Takes place simultaneously with previous procedure.

Details - Getting Electricity in Taiwan, China - Measure of Quality

	Answer
Reliability of supply and transparency of tariff index (0-8)	8
Total duration and frequency of outages per customer a year (0-3)	3
System average interruption duration index (SAIDI)	0.3
System average interruption frequency index (SAIFI)	0.2
What is the minimum outage time (in minutes) that the utility considers for the calculation of SAIDI/SAIFI	1.0
Mechanisms for monitoring outages (0-1)	1
Does the distribution utility use automated tools to monitor outages?	Yes
Mechanisms for restoring service (0-1)	1
Does the distribution utility use automated tools to restore service?	Yes
Regulatory monitoring (0-1)	1
Does a regulator—that is, an entity separate from the utility—monitor the utility's performance on reliability of supply?	Yes
Financial deterrents aimed at limiting outages (0-1)	1
Does the utility either pay compensation to customers or face fines by the regulator (or both) if outages exceed a certain cap?	Yes
Communication of tariffs and tariff changes (0-1)	1
Are effective tariffs available online?	Yes
Link to the website, if available online	http://www.taipower.com
Are customers notified of a change in tariff ahead of the billing cycle?	Yes

Note:

If the duration and frequency of outages is 100 or less, the economy is eligible to score on the Reliability of supply and transparency of tariff index.

If the duration and frequency of outages is not available, or is over 100, the economy is not eligible to score on the index.

If the minimum outage time considered for SAIDI/SAIFI is over 5 minutes, the economy is not eligible to score on the index.

Registering Property

This topic examines the steps, time and cost involved in registering property, assuming a standardized case of an entrepreneur who wants to purchase land and a building that is already registered and free of title dispute. In addition, the topic also measures the quality of the land administration system in each economy. The quality of land administration index has five dimensions: reliability of infrastructure, transparency of information, geographic coverage, land dispute resolution, and equal access to property rights. The most recent round of data collection for the project was completed in June 2017. [See the methodology for more information.](#)

What the indicators measure	Case study assumptions
<p>Procedures to legally transfer title on immovable property (number)</p>	<p>To make the data comparable across economies, several assumptions about the parties to the transaction, the property and the procedures are used.</p>
<p>Preregistration procedures (for example, checking for liens, notarizing sales agreement, paying property transfer taxes)</p> <p>Registration procedures in the economy's largest business citya.</p> <p>Postregistration procedures (for example, filling title with municipality)</p>	<p>The parties (buyer and seller):</p> <ul style="list-style-type: none"> - Are limited liability companies (or the legal equivalent). - Are located in the periurban area of the economy's largest business city. For 11 economies the data are also collected for the second largest business city. - Are 100% domestically and privately owned. - Have 50 employees each, all of whom are nationals. - Perform general commercial activities.
<p>Time required to complete each procedure (calendar days)</p>	<p>The property (fully owned by the seller):</p>
<p>Does not include time spent gathering information</p> <p>Each procedure starts on a separate day - though procedures that can be fully completed online are an exception to this rule</p> <p>Procedure is considered completed once final document is received</p> <p>No prior contact with officials</p>	<ul style="list-style-type: none"> - Has a value of 50 times income per capita, which equals the sale price. - Is fully owned by the seller. - Has no mortgages attached and has been under the same ownership for the past 10 years. - Is registered in the land registry or cadastre, or both, and is free of title disputes. - Is located in a periurban commercial zone, and no rezoning is required. - Consists of land and a building. The land area is 557.4 square meters (6,000 square feet). A two-story warehouse of 929 square meters (10,000 square feet) is located on the land. The warehouse is 10 years old, is in good condition, has no heating system and complies with all safety standards, building codes and legal requirements. The property, consisting of land and building, will be transferred in its entirety. - Will not be subject to renovations or additional construction following the purchase. - Has no trees, natural water sources, natural reserves or historical monuments of any kind. - Will not be used for special purposes, and no special permits, such as for residential use, industrial plants, waste storage or certain types of agricultural activities, are required. - Has no occupants, and no other party holds a legal interest in it.
<p>Cost required to complete each procedure (% of property value)</p>	
<p>Official costs only (such as administrative fees, duties and taxes).</p> <p>Value Added Tax, Capital Gains Tax and illicit payments are excluded</p>	
<p>Quality of land administration index (0-30)</p>	
<p>Reliability of infrastructure index (0-8)</p> <p>Transparency of information index (0-6)</p> <p>Geographic coverage index (0-8)</p> <p>Land dispute resolution index (0-8)</p> <p>Equal access to property rights index (-2-0)</p>	


Registering Property - Taiwan, China

Standardized Company

Property value	TWD 37,638,586.00
City Covered	Taipei


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Procedures (number)	3	5.5	4.6	1.00 (4 Economies)
Time (days)	4	74.5	22.3	1.00 (3 Economies)
Cost (% of property value)	6.2	4.3	4.2	0.00 (5 Economies)
Quality of the land administration index (0-30)	28.5	15.8	22.7	29.00 (Singapore)

Figure - Registering Property in Taiwan, China and comparator economies - Ranking and DTF

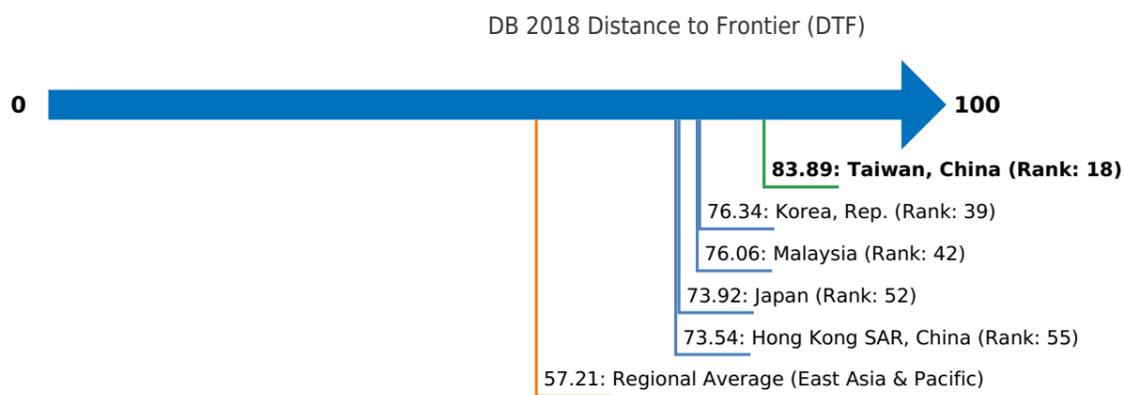

Note: The ranking of economies on the ease of registering property is determined by sorting their distance to frontier scores for registering property. These scores are the simple average of the distance to frontier scores for each of the component indicators.


Figure - Registering Property in Taiwan, China - Procedure, Time and Cost

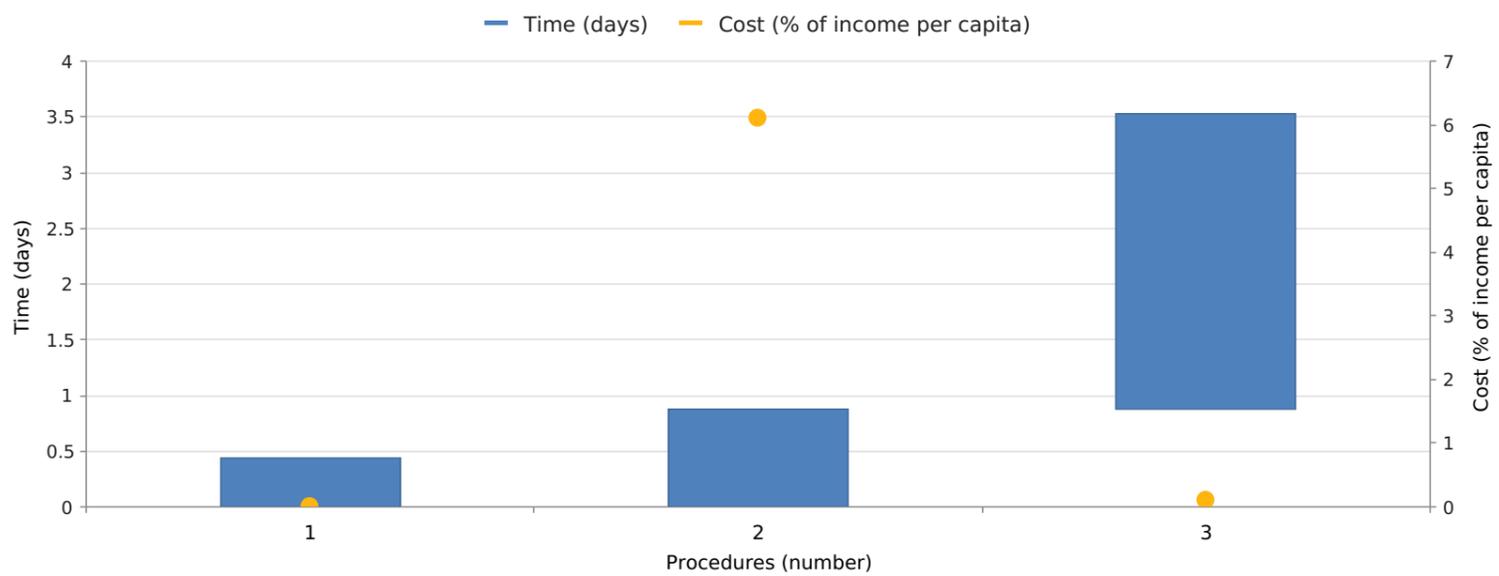

*This symbol is shown beside procedure numbers that take place simultaneously with the previous procedure.

Note: Online procedures account for 0.5 days in the total time calculation. For economies that have a different procedure list for men and women, the graph shows the time for women. For more information on methodology, see the *Doing Business* website (<http://doingbusiness.org/en/methodology>). For details on the procedures reflected here, see the summary below.

Figure - Registering Property in Taiwan, China and comparator economies - Measure of Quality

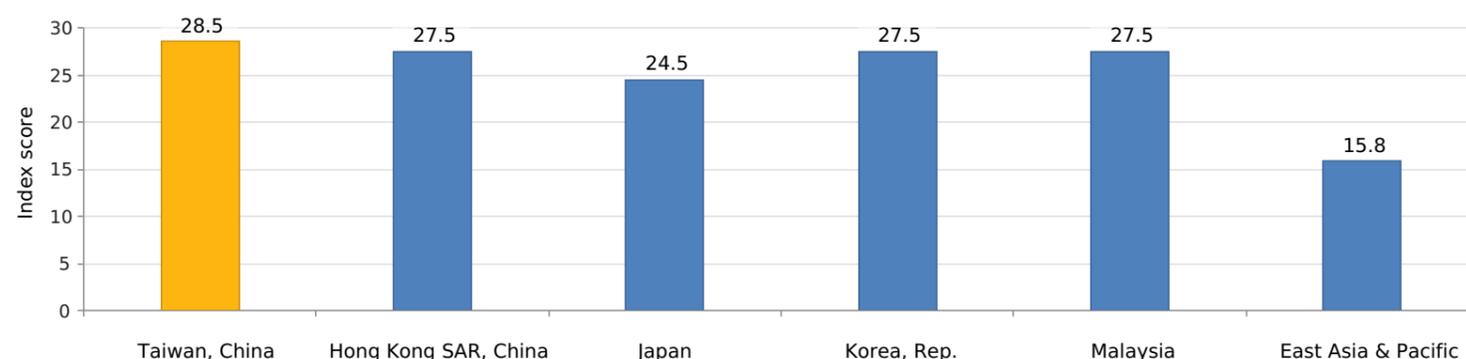

Details - Registering Property in Taiwan, China - Procedure, Time and Cost

No.	Procedures	Time to Complete	Associated Costs
1	<p>Buyer researches the property rights and encumbrances registered against the property at the registry of titles</p> <p><i>Agency : Land Registry</i></p> <p>The buyer obtains copies of the land and building's registration from the electronic registration database. Each page costs TWD 20.</p>	Less than one day (online procedure)	TWD 10 for the search and TWD 20 per sheet of e-transcript
2	<p>Buyer pays the Deed tax at the Municipality</p> <p><i>Agency : Municipality</i></p> <p>The Deed tax is 6% of the standard property value, and buyer pays it at the Municipality. Seller pays the Land value increase tax. As a result, Taiwan government (Real-estate Valuation Committee) issues so-called "standard" valuation information of property every year for tax authorities' and tax payers' reference. After years, such government announcement of valuation becomes the reported tax base by taxpayers and acceptable by tax authorities. The real "contract price" might be ignored when filing deed tax in practice now. The standard value is always lower than market price.</p> <p>As of January 30 2005, the Land value increase tax (capital gains tax) is levied according to the following rates:</p> <p>(1) Where the net increase of the value of any land is no more than 100 percent of the original value of such land, the rate shall be 20 percent of the net increase.</p> <p>(2) Where the net increase of the value of any land is no more than 200 percent of the original value of such land, the rate shall be 30 percent of that part of the net increase which exceeds the original value by more than 100 percent in addition to the rate prescribed in the preceding section.</p> <p>(3) Where the net increase of the value of any land is no more than 300 percent of the original value of such land, the rate shall be 40 percent of that part of the net increase which exceeds the original value by more than 200 percent in addition to the rates prescribed in the preceding section.</p> <p>As of October 2009, the Ministry of Finance completed the development of the Local Tax Online Filing Portal, provided for use by the public nationwide. Taiwan government spent two years planning this system, which enables the public to carry out the filing for these local taxes online at home, and speeds up the procedure for property registration. (The Local Tax Online Filing Portal website can be visited at: https://www.etax.nat.gov.tw/wSite/indexLocal.htm)</p>	Less than one day (online procedure)	6% of standard property value (Deed Tax) + 0.1% Stamp Duty
3	<p>Registration of transfer of title at the Land Registry</p> <p><i>Agency : Land Registry</i></p> <p>The transfer of title is registered at the Land Registry. The original ownership certificate must be returned and a new one is issued.</p>	3 days	0.1% of property value (registration fee) + TWD 80 for new ownership certificate

→ Takes place simultaneously with previous procedure.

Details - Registering Property in Taiwan, China - Measure of Quality

	Answer	Score
Quality of the land administration index (0-30)		28.5
Reliability of infrastructure index (0-8)		8.0
What is the institution in charge of immovable property registration?	Land Office	
In what format are the majority of title or deed records kept in the largest business city—in a paper format or in a computerized format (scanned or fully digital)?	Computer/Fully digital	2.0
Is there an electronic database for checking for encumbrances (liens, mortgages, restrictions and the like)?	Yes	1.0
Institution in charge of the plans showing legal boundaries in the largest business city:	Land Office	
In what format are the majority of maps of land plots kept in the largest business city—in a paper format or in a computerized format (scanned or fully digital)?	Computer/Fully digital	2.0
Is there an electronic database for recording boundaries, checking plans and providing cadastral information (geographic information system)?	Yes	1.0
Is the information recorded by the immovable property registration agency and the cadastral or mapping agency kept in a single database, in different but linked databases or in separate databases?	Single database	1.0
Do the immovable property registration agency and cadastral or mapping agency use the same identification number for properties?	Yes	1.0
Transparency of information index (0-6)		4.5
Who is able to obtain information on land ownership at the agency in charge of immovable property registration in the largest business city?	Anyone who pays the official fee	1.0
Is the list of documents that are required to complete any type of property transaction made publicly available—and if so, how?	Yes, online	0.5
Link for online access:	1. http://www.land.mcid=52&qcode= 2. http://www.e-services.taipei.gov.t HYPAGE=index_01.l 3. http://www.land.gov xItem=59214040&C	
Is the applicable fee schedule for any property transaction at the agency in charge of immovable property registration in the largest business city made publicly available—and if so, how?	Yes, online	0.5
Link for online access:	1. http://www.land.gov ctNode=85161&mp- 2. http://w2.land.taip	
Does the agency in charge of immovable property registration commit to delivering a legally binding document that proves property ownership within a specific time frame—and if so, how does it communicate the service standard?	Yes, online	0.5
Link for online access:	1. http://www.land.gov xItem=59212504&C 2. http://www.land.gov xItem=70657500&c 3. http://www.e-services.taipei.gov.t HYPAGE=form.htm	
Is there a specific and separate mechanism for filing complaints about a problem that occurred at the agency in charge of immovable property registration?	No	0.0

Link for online access:	1. http://w2.land.taipei 2. http://www.land.moi LCID=305&lawnan	
Does the cadastral or mapping agency commit to delivering an updated map within a specific time frame—and if so, how does it communicate the service standard?	Yes, online	0.5
Link for online access:	1. http://law.moj.gov.t p=A&k1=%E5%9C 2. http://www.e-services.taipei.gov.t HYPAGE=form.htm	
Is there a specific and separate mechanism for filing complaints about a problem that occurred at the cadastral or mapping agency?	No	0.0
Contact information:	The Committee on Property Dispute Conciliation is set up by the Municipal or County Land Office, and the Committee shall employ members with land administration, construction, and legal backgrounds together with local distinguished persons. The following is website of the property dispute conciliation application in Taipei City Government: http://www.land.gov xItem=11837&CtNo	
Geographic coverage index (0-8)		8.0
Are all privately held land plots in the economy formally registered at the immovable property registry?	Yes	2.0
Are all privately held land plots in the largest business city formally registered at the immovable property registry?	Yes	2.0
Are all privately held land plots in the economy mapped?	Yes	2.0
Are all privately held land plots in the largest business city mapped?	Yes	2.0
Land dispute resolution index (0-8)		8.0
Does the law require that all property sale transactions be registered at the immovable property registry to make them opposable to third parties?	Yes	1.5
Is the system of immovable property registration subject to a state or private guarantee?	Yes	0.5
Is there a specific compensation mechanism to cover for losses incurred by parties who engaged in good faith in a property transaction based on erroneous information certified by the immovable property registry?	Yes	0.5
Does the legal system require a control of legality of the documents necessary for a property transaction (e.g., checking the compliance of contracts with requirements of the law)?	Yes	0.5
If yes, who is responsible for checking the legality of the documents?	Registrar.	
Does the legal system require verification of the identity of the parties to a property transaction?	Yes	0.5

If yes, who is responsible for verifying the identity of the parties?	Registrar.	
Is there a national database to verify the accuracy of identity documents?	Yes	1.0
For a standard land dispute between two local businesses over tenure rights of a property worth 50 times gross national income (GNI) per capita and located in the largest business city, what court would be in charge of the case in the first instance?	Taiwan Taipei District Court	
How long does it take on average to obtain a decision from the first-instance court for such a case (without appeal)?	Less than a year	3.0
Are there any statistics on the number of land disputes in the first instance?	Yes	0.5
Number of land disputes in the largest business city in 2016:	122,163 cases (for all kinds of property disputes) 84.26% (122163 / 144990 * 100% = 84.26%)	
Equal access to property rights index (-2-0)		0.0
Do unmarried men and unmarried women have equal ownership rights to property?	Yes	0.0
Do married men and married women have equal ownership rights to property?	Yes	0.0

Getting Credit


This topic explores two sets of issues—the strength of credit reporting systems and the effectiveness of collateral and bankruptcy laws in facilitating lending. The most recent round of data collection for the project was completed in June 2017. [See the methodology for more information.](#)

What the indicators measure	Case study assumptions
<p>Strength of legal rights index (0-12)</p> <p>Rights of borrowers and lenders through collateral laws (0-10)</p> <p>Protection of secured creditors' rights through bankruptcy laws (0-2)</p> <p>Depth of credit information index (0-8)</p> <p>Scope and accessibility of credit information distributed by credit bureaus and credit registries (0-8)</p> <p>Credit bureau coverage (% of adults)</p> <p>Number of individuals and firms listed in largest credit bureau as a percentage of adult population</p> <p>Credit registry coverage (% of adults)</p> <p>Number of individuals and firms listed in credit registry as a percentage of adult population</p>	<p>Doing Business assesses the sharing of credit information and the legal rights of borrowers and lenders with respect to secured transactions through 2 sets of indicators. The depth of credit information index measures rules and practices affecting the coverage, scope and accessibility of credit information available through a credit registry or a credit bureau. The strength of legal rights index measures the degree to which collateral and bankruptcy laws protect the rights of borrowers and lenders and thus facilitate lending. For each economy it is first determined whether a unitary secured transactions system exists. Then two case scenarios, case A and case B, are used to determine how a nonpossessory security interest is created, publicized and enforced according to the law. Special emphasis is given to how the collateral registry operates (if registration of security interests is possible). The case scenarios involve a secured borrower, company ABC, and a secured lender, BizBank.</p> <p>In some economies the legal framework for secured transactions will allow only case A or case B (not both) to apply. Both cases examine the same set of legal provisions relating to the use of movable collateral.</p> <p>Several assumptions about the secured borrower (ABC) and lender (BizBank) are used:</p> <ul style="list-style-type: none"> - ABC is a domestic limited liability company (or its legal equivalent). - ABC has up to 50 employees. - ABC has its headquarters and only base of operations in the economy's largest business city. For 11 economies the data are also collected for the second largest business city. - Both ABC and BizBank are 100% domestically owned. <p>The case scenarios also involve assumptions. In case A, as collateral for the loan, ABC grants BizBank a nonpossessory security interest in one category of movable assets, for example, its machinery or its inventory. ABC wants to keep both possession and ownership of the collateral. In economies where the law does not allow nonpossessory security interests in movable property, ABC and BizBank use a fiduciary transfer-of-title arrangement (or a similar substitute for nonpossessory security interests).</p> <p>In case B, ABC grants BizBank a business charge, enterprise charge, floating charge or any charge that gives BizBank a security interest over ABC's combined movable assets (or as much of ABC's movable assets as possible). ABC keeps ownership and possession of the assets.</p>

Getting Credit - Taiwan, China


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Strength of legal rights index (0-12)	2	7.2	6.0	12.00 (4 Economies)
Depth of credit information index (0-8)	8	4.2	6.6	8.00 (34 Economies)
Credit registry coverage (% of adults)	0.0	16.0	18.3	100.00 (3 Economies)
Credit bureau coverage (% of adults)	98.4	22.3	63.7	100.00 (23 Economies)

Figure - Getting Credit in Taiwan, China and comparator economies - Ranking and DTF

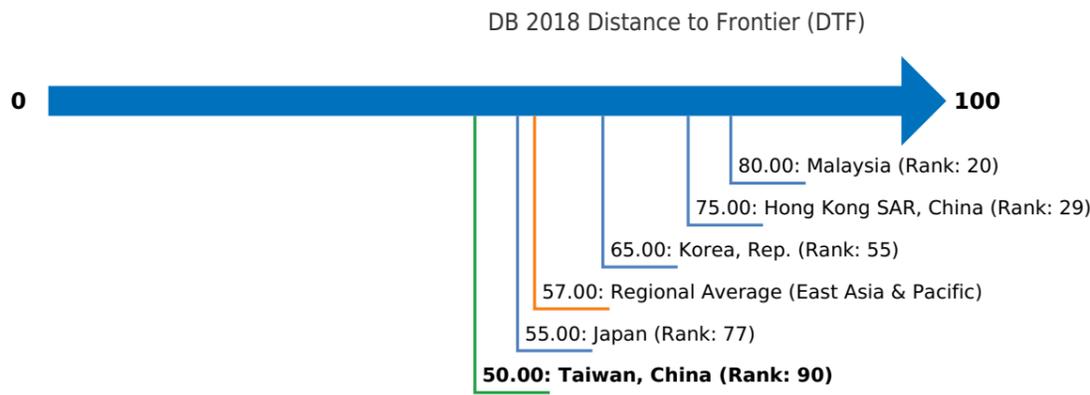

Note: The ranking of economies on the ease of getting credit is determined by sorting their distance to frontier scores for getting credit. These scores are the distance to frontier score for the sum of the strength of legal rights index and the depth of credit information index.

Figure - Legal Rights in Taiwan, China and comparator economies

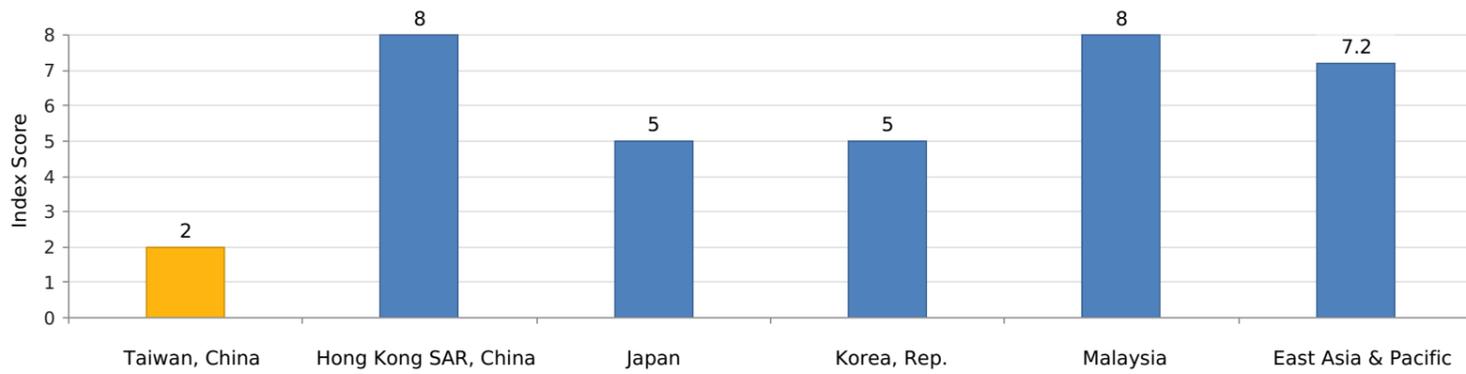


Details - Legal Rights in Taiwan, China

Strength of legal rights index (0-12) **2**

Does an integrated or unified legal framework for secured transactions that extends to the creation, publicity and enforcement of functional equivalents to security interests in movable assets exist in the economy?	No
Does the law allow businesses to grant a non possessory security right in a single category of movable assets, without requiring a specific description of collateral?	No
Does the law allow businesses to grant a non possessory security right in substantially all of its assets, without requiring a specific description of collateral?	No
May a security right extend to future or after-acquired assets, and does it extend automatically to the products, proceeds and replacements of the original assets?	No
Is a general description of debts and obligations permitted in collateral agreements; can all types of debts and obligations be secured between parties; and can the collateral agreement include a maximum amount for which the assets are encumbered?	Yes
Is a collateral registry in operation for both incorporated and non-incorporated entities, that is unified geographically and by asset type, with an electronic database indexed by debtor's name?	No
Does a notice-based collateral registry exist in which all functional equivalents can be registered?	No
Does a modern collateral registry exist in which registrations, amendments, cancellations and searches can be performed online by any interested third party?	No
Are secured creditors paid first (i.e. before tax claims and employee claims) when a debtor defaults outside an insolvency procedure?	No
Are secured creditors paid first (i.e. before tax claims and employee claims) when a business is liquidated?	No
Are secured creditors subject to an automatic stay on enforcement when a debtor enters a court-supervised reorganization procedure? Does the law protect secured creditors' rights by providing clear grounds for relief from the stay and sets a time limit for it?	No
Does the law allow parties to agree on out of court enforcement at the time a security interest is created? Does the law allow the secured creditor to sell the collateral through public auction or private tender, as well as, for the secured creditor to keep the asset in satisfaction of the debt?	Yes

Figure - Credit Information in Taiwan, China and comparator economies

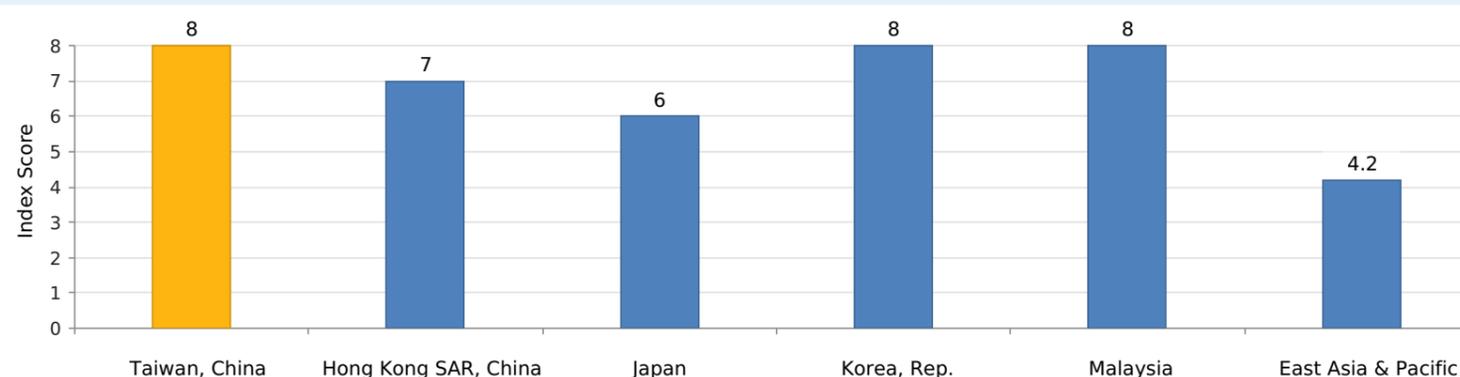

Details - Credit Information in Taiwan, China

Depth of credit information index (0-8)	Credit bureau	Credit registry	Score
Are data on both firms and individuals distributed?	Yes	No	1
Are both positive and negative credit data distributed?	Yes	No	1
Are data from retailers or utility companies - in addition to data from banks and financial institutions - distributed?	Yes	No	1
Are at least 2 years of historical data distributed? (Credit bureaus and registries that distribute more than 10 years of negative data or erase data on defaults as soon as they are repaid obtain a score of 0 for this component.)	Yes	No	1
Are data on loan amounts below 1% of income per capita distributed?	Yes	No	1
By law, do borrowers have the right to access their data in the credit bureau or credit registry?	Yes	No	1
Can banks and financial institutions access borrowers' credit information online (for example, through an online platform, a system-to-system connection or both)?	Yes	No	1
Are bureau or registry credit scores offered as a value-added service to help banks and financial institutions assess the creditworthiness of borrowers?	Yes	No	1
Score ("yes" to either public bureau or private registry)			8

Note: An economy receives a score of 1 if there is a "yes" to either bureau or registry. If the credit bureau or registry is not operational or covers less than 5% of the adult population, the total score on the depth of credit information index is 0.

Coverage	Credit bureau	Credit registry
Number of individuals	16,467,000	0
Number of firms	550,000	0
Total	17,017,000	0
Percentage of adult population	98.4	0.0

Protecting Minority Investors

This topic measures the strength of minority shareholder protections against misuse of corporate assets by directors for their personal gain as well as shareholder rights, governance safeguards and corporate transparency requirements that reduce the risk of abuse. The most recent round of data collection for the project was completed in June 2017. [See the methodology for more information.](#)

What the indicators measure

Extent of disclosure index (0-10): Review and approval requirements for related-party transactions; Disclosure requirements for related-party transactions

Extent of director liability index (0-10): Ability of minority shareholders to sue and hold interested directors liable for prejudicial related-party transactions; Available legal remedies (damages, disgorgement of profits, fines, imprisonment, rescission of the transaction)

Ease of shareholder suits index (0-10): Access to internal corporate documents; Evidence obtainable during trial and allocation of legal expenses

Extent of conflict of interest regulation index (0-10): Simple average of the extent of disclosure, extent of director liability and ease of shareholder indices

Extent of shareholder rights index (0-10): Shareholders' rights and role in major corporate decisions

Extent of ownership and control index (0-10): Governance safeguards protecting shareholders from undue board control and entrenchment

Extent of corporate transparency index (0-10): Corporate transparency on ownership stakes, compensation, audits and financial prospects

Extent of shareholder governance index (0-10): Simple average of the extent of shareholders rights, extent of ownership and control and extent of corporate transparency indices

Strength of minority investor protection index (0-10): Simple average of the extent of conflict of interest regulation and extent of shareholder governance indices

Case study assumptions

To make the data comparable across economies, a case study uses several assumptions about the business and the transaction.

The business (Buyer):

- Is a publicly traded corporation listed on the economy's most important stock exchange. If the number of publicly traded companies listed on that exchange is less than 10, or if there is no stock exchange in the economy, it is assumed that Buyer is a large private company with multiple shareholders.
- Has a board of directors and a chief executive officer (CEO) who may legally act on behalf of Buyer where permitted, even if this is not specifically required by law.
- Has a supervisory board (applicable to economies with a two-tier board system) on which 60% of the shareholder-elected members have been appointed by Mr. James, who is Buyer's controlling shareholder and a member of Buyer's board of directors.
- Has not adopted any bylaws or articles of association that differ from default minimum standards and does not follow any nonmandatory codes, principles, recommendations or guidelines relating to corporate governance.
- Is a manufacturing company with its own distribution network.


The transaction involves the following details:

- Mr. James owns 60% of Buyer and elected two directors to Buyer's five-member board.
- Mr. James also owns 90% of Seller, a company that operates a chain of retail hardware stores. Seller recently closed a large number of its stores.
- Mr. James proposes that Buyer purchase Seller's unused fleet of trucks to expand Buyer's distribution of its food products, a proposal to which Buyer agrees. The price is equal to 10% of Buyer's assets and is higher than the market value.
- The proposed transaction is part of the company's ordinary course of business and is not outside the authority of the company.
- Buyer enters into the transaction. All required approvals are obtained, and all required disclosures made (that is, the transaction is not fraudulent).
- The transaction causes damages to Buyer. Shareholders sue Mr. James and the other parties that approved the transaction.

Protecting Minority Investors - Taiwan, China


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Extent of conflict of interest regulation index (0-10)	6.7	5.7	6.4	9.3 (New Zealand)
Extent of shareholder governance index (0-10)	7.3	4.8	6.4	9.00 (Kazakhstan)

Figure - Protecting Minority Investors in Taiwan, China and comparator economies - Ranking and DTF

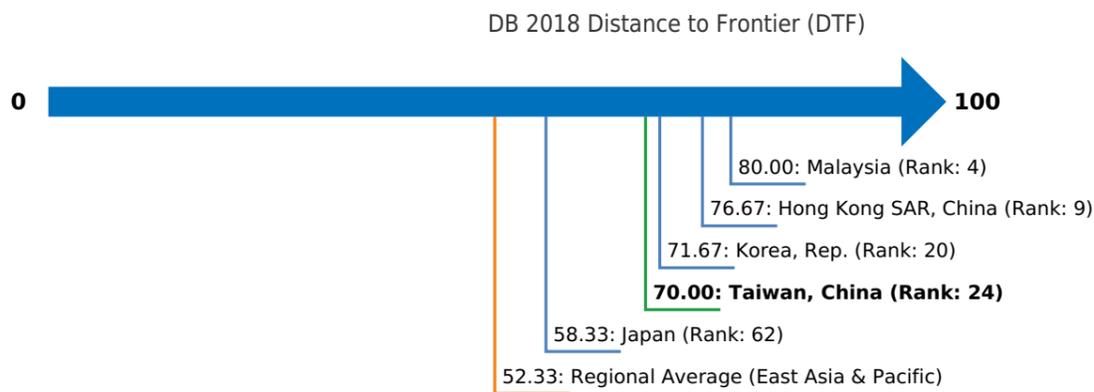

Note: The ranking of economies on the strength of minority investor protections is determined by sorting their distance to frontier scores for protecting minority investors. These scores are the simple average of the distance to frontier scores for the extent of conflict of interest regulation index and the extent of shareholder governance index.

Figure - Protecting Minority Investors in Taiwan, China and comparator economies - Measure of Quality

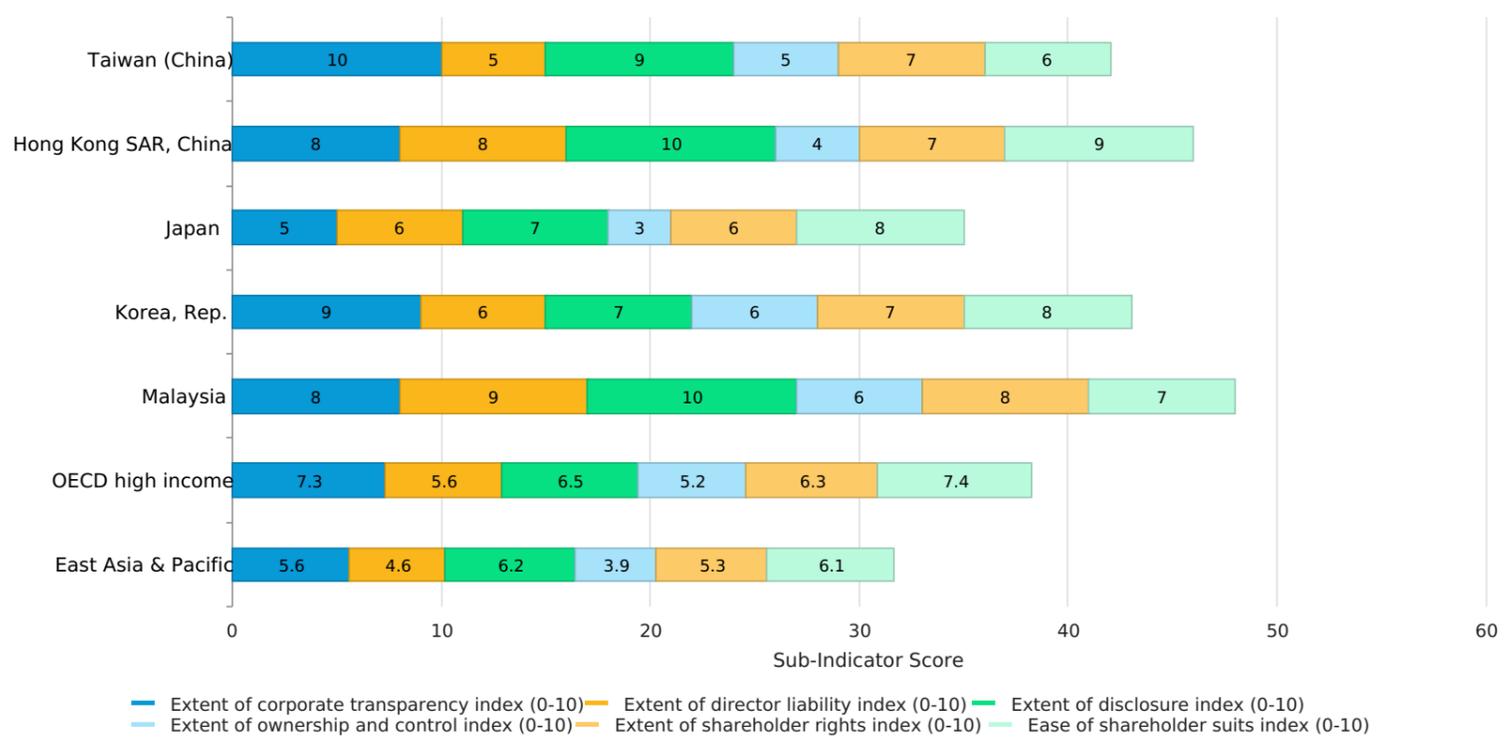

Details - Protecting Minority Investors in Taiwan, China - Measure of Quality

	Answer	Score
Extent of conflict of interest regulation index (0-10)		6.7
Extent of disclosure index (0-10)		9
Which corporate body is legally sufficient to approve the Buyer-Seller transaction? (0-3)	Board of directors excluding interested members	2.0
Must an external body review the terms of the transaction before it takes place? (0-1)	Yes	1.0
Must Mr. James disclose his conflict of interest to the board of directors? (0-2)	Full disclosure of all material facts	2.0
Must Buyer disclose the transaction in published periodic filings (annual reports)? (0-2)	Disclosure on the transaction and on the conflict of interest	2.0
Must Buyer immediately disclose the transaction to the public and/or shareholders? (0-2)	Disclosure on the transaction and on the conflict of interest	2.0
Extent of director liability index (0-10)		5
Can shareholders representing 10% of Buyer's share capital sue directly or derivatively for the damage the transaction caused to Buyer? (0-1)	Yes	1.0
Can shareholders hold the interested director liable for the damage the transaction caused to Buyer? (0-2)	Liable if negligent	1.0
Can shareholders hold the other directors liable for the damage the transaction caused to Buyer (0-2)	Liable if negligent	1.0
Must Mr. James pay damages for the harm caused to Buyer upon a successful claim by shareholders? (0-1)	Yes	1.0
Must Mr. James repay profits made from the transaction upon a successful claim by shareholders? (0-1)	No	0.0
Is Mr. James disqualified or fined and imprisoned upon a successful claim by shareholders? (0-1)	Yes	1.0
Can a court void the transaction upon a successful claim by shareholders? (0-2)	Only in case of fraud or bad faith	0.0
Ease of shareholder suits index (0-10)		6
Before suing can shareholders representing 10% of Buyer's share capital inspect the transaction documents? (0-1)	No	0.0
Can the plaintiff obtain any documents from the defendant and witnesses at trial? (0-3)	Any relevant document	3.0
Can the plaintiff request categories of documents from the defendant without identifying specific ones? (0-1)	No	0.0
Can the plaintiff directly question the defendant and witnesses at trial? (0-2)	Preapproved questions only	1.0
Is the level of proof required for civil suits lower than that of criminal cases? (0-1)	Yes	1.0
Can shareholder plaintiffs recover their legal expenses from the company? (0-2)	Yes if successful	1.0
Extent of shareholder governance index (0-10)		7.3
Extent of shareholder rights index (0-10)		7
Does the sale of 51% of Buyer's assets require shareholder approval?	Yes	1.0
Can shareholders representing 10% of Buyer's share capital call for a meeting of shareholders?	Yes	1.0

Must Buyer obtain its shareholders' approval every time it issues new shares?	No	0.0
Do shareholders automatically receive preemption rights every time Buyer issues new shares?	Yes	1.0
Must shareholders approve the election and dismissal of the external auditor?	No	0.0
Are changes to the rights of a class of shares only possible if the holders of the affected shares approve?	Yes	1.0
Assuming that Buyer is a limited company, does the sale of 51% of its assets require member approval?	Yes	1.0
Assuming that Buyer is a limited company, can members representing 10% call for a meeting of members?	Yes	1.0
Assuming that Buyer is a limited company, must all members consent to add a new member?	No	0.0
Assuming that Buyer is a limited company, must a member first offer to sell their interest to the existing members before they can sell to non-members?	Yes	1.0
Extent of ownership and control index (0-10)		5
Is it forbidden to appoint the same individual as CEO and chair of the board of directors?	No	0.0
Must the board of directors include independent and nonexecutive board members?	Yes	1.0
Can shareholders remove members of the board of directors without cause before the end of their term?	Yes	1.0
Must the board of directors include a separate audit committee exclusively comprising board members?	No	0.0
Must a potential acquirer make a tender offer to all shareholders upon acquiring 50% of Buyer?	Yes	1.0
Must Buyer pay declared dividends within a maximum period set by law?	Yes	1.0
Is a subsidiary prohibited from acquiring shares issued by its parent company?	No	0.0
Assuming that Buyer is a limited company, must Buyer have a mechanism to resolve disagreements among members?	Yes	1.0
Assuming that Buyer is a limited company, must a potential acquirer make a tender offer to all shareholders upon acquiring 50% of Buyer?	No	0.0
Assuming that Buyer is a limited company, must Buyer distribute profits within a maximum period set by law?	No	0.0
Extent of corporate transparency index (0-10)		10
Must Buyer disclose direct and indirect beneficial ownership stakes representing 5%?	Yes	1.0
Must Buyer disclose information about board members' primary employment and directorships in other companies?	Yes	1.0
Must Buyer disclose the compensation of individual managers?	Yes	1.0
Must a detailed notice of general meeting be sent 21 days before the meeting?	Yes	1.0
Can shareholders representing 5% of Buyer's share capital put items on the general meeting agenda?	Yes	1.0
Must Buyer's annual financial statements be audited by an external auditor?	Yes	1.0
Must Buyer disclose its audit reports to the public?	Yes	1.0
Assuming that Buyer is a limited company, must members meet at least once a year?	Yes	1.0
Assuming that Buyer is a limited company, can members representing 5% put items on the meeting agenda?	Yes	1.0
Assuming that Buyer is a limited company, must Buyer's annual financial statements be audited by an external auditor?	Yes	1.0

Paying Taxes

This topic records the taxes and mandatory contributions that a medium-size company must pay or withhold in a given year, as well as measures the administrative burden in paying taxes and contributions. The most recent round of data collection for the project was completed on June 30, 2017 covering for the Paying Taxes indicator calendar year 2016 (January 1, 2016 – December 31, 2016).

Last year (*Doing Business 2017*) the scope of data collection was expanded to better understand the overall tax environment in an economy. The questionnaire was expanded to include new questions on post-filing processes: VAT refund and tax audit. The data shows where postfiling processes and practices work efficiently and what drives the differences in the overall tax compliance cost across economies.


The new section covers both the legal framework and the administrative burden on businesses to comply with postfiling processes. [See the methodology for more information.](#)

What the indicators measure	Case study assumptions
<p>Tax payments for a manufacturing company in 2016 (number per year adjusted for electronic and joint filing and payment)</p>	<p>Using a case scenario, <i>Doing Business</i> records taxes and mandatory contributions a medium size company must pay in a year, and measures the administrative burden of paying taxes, contributions and dealing with postfiling processes. Information is also compiled on frequency of filing and payments, time taken to comply with tax laws, time taken to comply with the requirements of postfiling processes and time waiting.</p>
<p>Total number of taxes and contributions paid, including consumption taxes (value added tax, sales tax or goods and service tax)</p> <p>Method and frequency of filing and payment</p>	<p>To make data comparable across economies, several assumptions are used:</p> <ul style="list-style-type: none"> - TaxpayerCo is a medium-size business that started operations on January 1, 2015. It produces ceramic ?owerpots and sells them at retail. All taxes and contributions recorded are paid in the second year of operation (calendar year 2016). Taxes and mandatory contributions are measured at all levels of government.
<p>Time required to comply with 3 major taxes (hours per year)</p>	<p>The VAT refund process:</p>
<p>Collecting information, computing tax payable</p> <p>Completing tax return, filing with agencies</p> <p>Arranging payment or withholding</p> <p>Preparing separate tax accounting books, if required</p>	<ul style="list-style-type: none"> - In June 2016, TaxpayerCo. makes a large capital purchase: the value of the machine is 65 times income per capita of the economy. Sales are equally spread per month (1,050 times income per capita divided by 12) and cost of goods sold are equally expensed per month (875 times income per capita divided by 12). The machinery seller is registered for VAT and excess input VAT incurred in June will be fully recovered after four consecutive months if the VAT rate is the same for inputs, sales and the machine and the tax reporting period is every month. Input VAT will exceed Output VAT in June 2016.
<p>Total tax and contribution rate (% of profit before all taxes)</p>	<p>The corporate income tax audit process:</p>
<p>Profit or corporate income tax</p> <p>Social contributions, labor taxes paid by employer</p> <p>Property and property transfer taxes</p> <p>Dividend, capital gains, financial transactions taxes</p> <p>Waste collection, vehicle, road and other taxes</p>	<ul style="list-style-type: none"> - An error in calculation of income tax liability (for example, use of incorrect tax depreciation rates, or incorrectly treating an expense as tax deductible) leads to an incorrect income tax return and a corporate income tax underpayment. TaxpayerCo. discovered the error and voluntarily notified the tax authority. The value of the underpaid income tax liability is 5% of the corporate income tax liability due. TaxpayerCo. submits corrected information after the deadline for submitting the annual tax return, but within the tax assessment period.
<p>Postfiling Index</p>	
<p>Time to comply with a VAT refund</p> <p>Time to receive a VAT refund</p> <p>Time to comply with a corporate income tax audit</p> <p>Time to complete a corporate income tax audit</p>	

Paying Taxes - Taiwan, China


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Payments (number per year)	11	21.8	10.9	3 (Hong Kong SAR, China)
Time (hours per year)	221	189.2	160.7	50 (Estonia)
Total tax and contribution rate (% of profit)	34.3	33.6	40.1	18.47 (32 Economies)
Postfiling index (0-100)	63.17	56.55	83.45	99.38 (Estonia)

Figure - Paying Taxes in Taiwan, China and comparator economies - Ranking and DTF

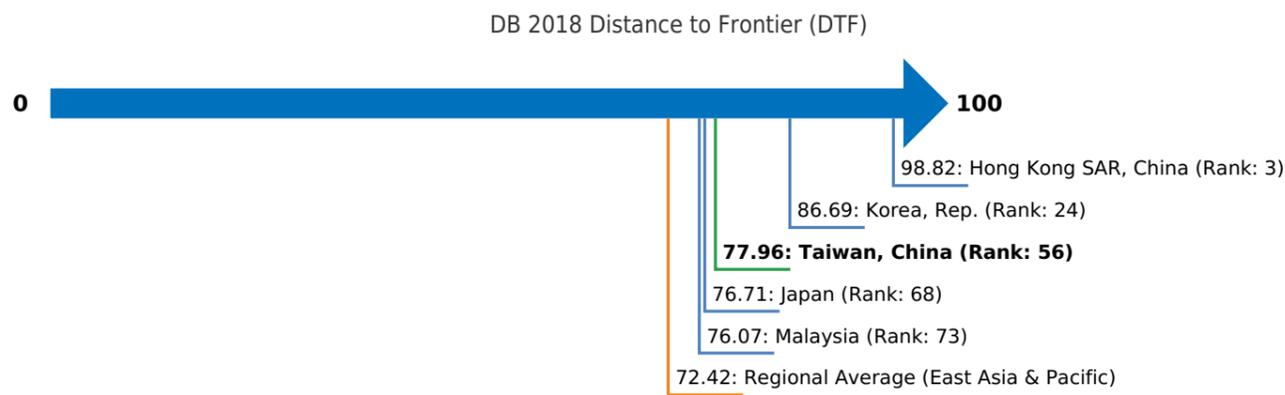

Note: The ranking of economies on the ease of paying taxes is determined by sorting their distance to frontier scores on the ease of paying taxes. These scores are the simple average of the distance to frontier scores for each of the four component indicators - number of tax payments, time, total tax rate and postfiling index - with a threshold and a nonlinear transformation applied to one of the component indicators, the total tax rate. The nonlinear distance to frontier for the total tax rate is equal to the distance to frontier for the total tax rate to the power of 0.8. The threshold is defined as the total tax rate at the 15th percentile of the overall distribution for all years included in the analysis up to and including Doing Business 2015, which is 26.1%. All economies with a total tax rate below this threshold receive the same score as the economy at the threshold.

Figure - Paying Taxes in Taiwan, China and comparator economies - Measure of Quality

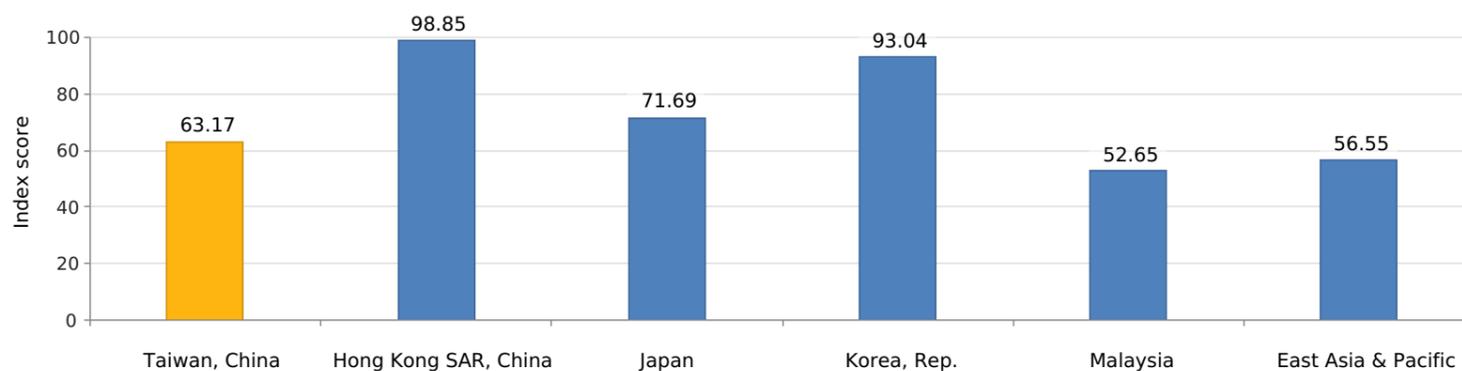

Details - Paying Taxes in Taiwan, China

Tax or mandatory contribution	Payments (number)	Notes on Payments	Time (hours)	Statutory tax rate	Tax base	Total tax and contribution rate (% of profit)	Notes on TTR
Corporate income tax	1.0	online filing	161.0	17%	taxable profit	12.53	
Employer paid - Pension contributions	1.0	online		6%	gross salaries	6.93	
Employer paid - Labor insurance contributions	1.0	online	27.0	various rates	gross salaries	6.15	
Employer paid - Mandatory health insurance contributions	1.0	online		various rates	gross salaries	5.23	
Taipei City house tax	1.0			3%	assessed building value	2.87	
Taipei City land value tax	1.0			1% - 5.5%	assessed land value	0.51	
Tax on interest	0.0			10%	interest income	0.26	not included
Vehicle license tax	1.0	online		TWD 11,700	fixed fee	0.03	
Value added tax (VAT)	1.0	online filing	33.0	5%	value added	0.00	not included
Employee paid - Labor insurance contributions	0.0	online and jointly		various rates	gross salaries	0.00	withheld
Employee paid - Mandatory health insurance contributions	0.0	online and jointly		various rates	gross salaries	0.00	withheld
Fuel tax	1.0	online		various rates	engine size	0.00	small amount
Land value increment tax	1.0			various rates	gain	0.00	small amount
Stamp duty on contracts	1.0			0.1%	transaction value	0.00	small amount
Totals	11		221			34.3	

Details - Paying Taxes in Taiwan, China - Tax by Type

Taxes by type	Answer
Postfiling index (0-100)	63.17
Profit tax (% of profit)	12.5
Labor tax and contributions (% of profit)	18.3

Other taxes (% of profit)

3.4

Details - Paying Taxes in Taiwan, China - Measure of Quality

	Answer	Score
Postfiling index (0-100)		63.17
VAT refunds		
Does VAT exist?	Yes	
Does a VAT refund process exist per the case study?	Yes	
Restrictions on VAT refund process	Restricted to international traders and capital investments	
Percentage of cases exposed to a VAT audit (%)	0% - 24%	
Is there a mandatory carry forward period?	No	
Time to comply with VAT refund (hours)	No VAT	91
Time to obtain a VAT refund (weeks)	No VAT	82.37
Corporate income tax audits		
Does corporate income tax exist?	Yes	
Percentage of cases exposed to a corporate income tax audit (%)	25% - 49%	
Time to comply with a corporate income tax audit (hours)	31.5	44.95
Time to complete a corporate income tax audit (weeks)	21.0	34.38

Notes: Names of taxes have been standardized. For instance income tax, profit tax, tax on company's income are all named corporate income tax in this table.

The hours for VAT include all the VAT and sales taxes applicable.

The hours for Social Security include all the hours for labor taxes and mandatory contributions in general.

The postfiling index is the average of the scores on time to comply with VAT refund, time to obtain a VAT refund, time to comply with a corporate income tax audit and time to complete a corporate income tax audit.

N/A = Not applicable.

Trading across Borders

Doing Business records the time and cost associated with the logistical process of exporting and importing goods. *Doing Business* measures the time and cost (excluding tariffs) associated with three sets of procedures—documentary compliance, border compliance and domestic transport—within the overall process of exporting or importing a shipment of goods. The most recent round of data collection for the project was completed in June 2017. [See the methodology for more information.](#)


Given the importance of trade digitalization, in *Doing Business 2018*, the Trading across Borders questionnaire included research questions on the availability and status of implementation of Electronic Data Interchange (EDI) and Single Window (SW) systems. With this information, *Doing Business* built a comprehensive dataset on the adoption and level of sophistication of electronic platforms in 190 economies. These data are not used to compute the distance to frontier score or ranking of the ease of doing business. The new dataset on EDI and SW systems is available [here](#).

What the indicators measure	Case study assumptions
<p>Documentary compliance</p> <ul style="list-style-type: none"> Obtaining, preparing and submitting documents during transport, clearance, inspections and port or border handling in origin economy Obtaining, preparing and submitting documents required by destination economy and any transit economies Covers all documents required by law and in practice, including electronic submissions of information <p>Border compliance</p> <ul style="list-style-type: none"> Customs clearance and inspections Inspections by other agencies (if applied to more than 20% of shipments) Handling and inspections that take place at the economy's port or border <p>Domestic transport</p> <ul style="list-style-type: none"> Loading or unloading of the shipment at the warehouse or port/border Transport between warehouse and port/border Traffic delays and road police checks while shipment is en route 	<p>To make the data comparable across economies, several assumptions about the business and the procedures are used. It is assumed that any required information is readily available and that the entrepreneur will pay no bribes.</p> <p>The business:</p> <ul style="list-style-type: none"> - Is a limited liability company (or its legal equivalent). If there is more than one type of limited liability company in the economy, the most common among domestic firms is chosen. Information on the most common form is obtained from incorporation lawyers or the statistical office. - Operates in the economy's largest business city and the entire office space is approximately 929 square meters (10,000 square feet). For 11 economies the data are also collected for the second largest business city. - Is 100% domestically owned and has five owners, none of whom is a legal entity; and has a start-up capital of 10 times income per capita and has a turnover of at least 100 times income per capita. - Performs general industrial or commercial activities, such as the production or sale of goods or services to the public. The business does not perform foreign trade activities and does not handle products subject to a special tax regime, for example, liquor or tobacco. It does not use heavily polluting production processes. - Leases the commercial plant or offices and is not a proprietor of real estate and the amount of the annual lease for the office space is equivalent to 1 times income per capita. - Does not qualify for investment incentives or any special benefits. - Has at least 10 and up to 50 employees one month after the commencement of operations, all of whom are domestic nationals. - Has a company deed 10 pages long. <p>The owners:</p> <ul style="list-style-type: none"> - Have reached the legal age of majority. If there is no legal age of majority, they are assumed to be 30 years old. - Are sane, competent, in good health and have no criminal record. - Are married and the marriage is monogamous and registered with the authorities. - Where the answer differs according to the legal system applicable to the woman or man in question (as may be the case in economies where there is legal plurality), the answer used will be the one that applies to the majority of the population.

Trading across Borders - Taiwan, China


Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Time to export: Border compliance (hours)	17	55.9	12.7	0 (17 Economies)
Cost to export: Border compliance (USD)	335	387.5	149.9	0.00 (19 Economies)
Time to export: Documentary compliance (hours)	5	68.2	2.4	1.0 (25 Economies)
Cost to export: Documentary compliance (USD)	84	112.1	35.4	0.00 (19 Economies)
Time to import: Border compliance (hours)	47	70.5	8.7	0.00 (21 Economies)
Cost to import: Border compliance (USD)	340	431.0	111.6	0.00 (27 Economies)
Time to import: Documentary compliance (hours)	4	65.6	3.5	1.0 (30 Economies)
Cost to import: Documentary compliance (USD)	65	111.4	25.6	0.00 (30 Economies)

Figure - Trading across Borders in Taiwan, China and comparator economies - Ranking and DTF

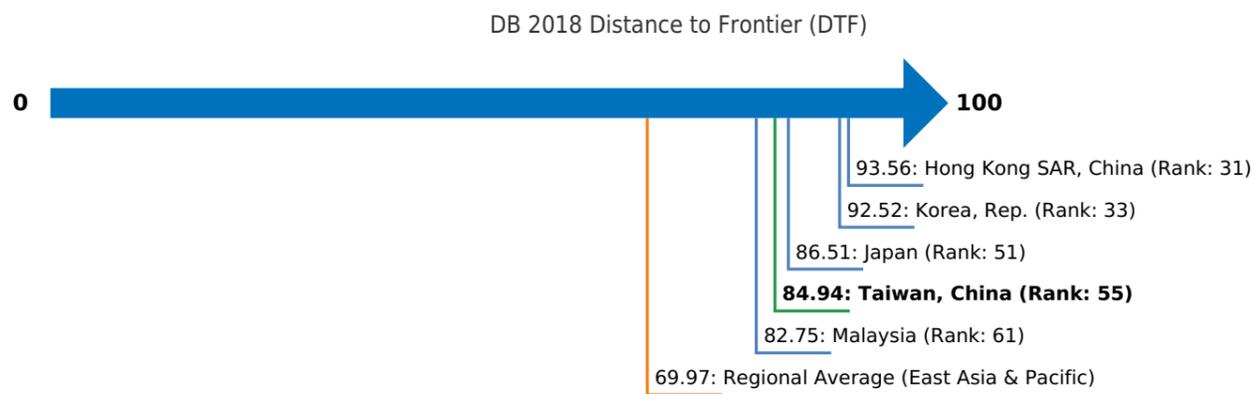

Note: The ranking of economies on the ease of trading across borders is determined by sorting their distance to frontier scores for trading across borders. These scores are the simple average of the distance to frontier scores for the time and cost for documentary compliance and border compliance to export and import (domestic transport is not used for calculating the ranking).

Figure - Trading across Borders in Taiwan, China - Time and Cost

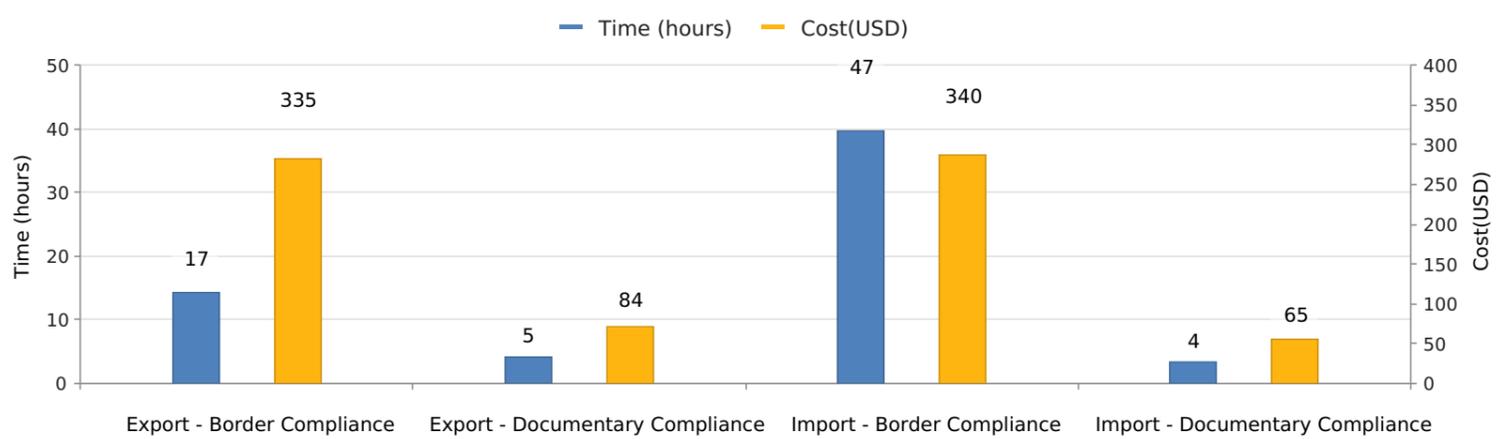

Details - Trading across Borders in Taiwan, China

Characteristics	Export	Import
Product	HS 85 : Electrical machinery and equipment and parts thereof; sound recorders and reproducers, television image and sound recorders and reproducers, and parts and accessories of such articles	HS 8708: Parts and accessories of motor vehicles
Trade partner	China	Germany
Border	Kaohsiung port	Kaohsiung port
Distance (km)	376	376
Domestic transport time (hours)	6	6
Domestic transport cost (USD)	300	300

Details - Trading across Borders in Taiwan, China - Components of Border Compliance

	Time to Complete (hours)	Associated Costs (USD)
Export: Clearance and inspections required by customs authorities	4.2	147.7
Export: Clearance and inspections required by agencies other than customs	0.0	0.0
Export: Port or border handling	12.6	187.7
Import: Clearance and inspections required by customs authorities	34.5	155.4
Import: Clearance and inspections required by agencies other than customs	0.0	0.0
Import: Port or border handling	12.9	185.0

Details - Trading across Borders in Taiwan, China - Trade Documents

Export	Import
Commercial invoice	Bill of lading
Packing list	Commercial invoice
Bill of lading	Packing list
Certificate of origin	Customs Import Declaration
Customs Export Declaration	SOLAS certificate
SOLAS certificate	

Enforcing Contracts

The enforcing contracts indicator measures the time and cost for resolving a commercial dispute through a local first-instance court, and the quality of judicial processes index, evaluating whether each economy has adopted a series of good practices that promote quality and efficiency in the court system. The most recent round of data collection was completed in June 2017. [See the methodology for more information.](#)

What the indicators measure	Case study assumptions
<p>Time required to enforce a contract through the courts (calendar days)</p>	<p>The dispute in the case study involves the breach of a sales contract between 2 domestic businesses. The case study assumes that the court hears an expert on the quality of the goods in dispute. This distinguishes the case from simple debt enforcement.</p>
<ul style="list-style-type: none"> Time to file and serve the case Time for trial and to obtain the judgment Time to enforce the judgment 	<p>To make the data comparable across economies, <i>Doing Business</i> uses several assumptions about the case:</p>
<p>Cost required to enforce a contract through the courts (% of claim)</p>	<ul style="list-style-type: none"> - The dispute concerns a lawful transaction between two businesses (Seller and Buyer), both located in the economy's largest business city. For 11 economies the data are also collected for the second largest business city. - The buyer orders custom-made goods, then fails to pay. - The value of the dispute is 200% of the income per capita or the equivalent in local currency of USD 5,000, whichever is greater. - The seller sues the buyer before the court with jurisdiction over commercial cases worth 200% of income per capita or \$5,000. - The seller requests a pretrial attachment to secure the claim. - The dispute on the quality of the goods requires an expert opinion. - The judge decides in favor of the seller; there is no appeal. - The seller enforces the judgment through a public sale of the buyer's movable assets.
<ul style="list-style-type: none"> Attorney fees Court fees Enforcement fees 	
<p>Quality of judicial processes index (0-18)</p>	
<ul style="list-style-type: none"> Court structure and proceedings (-1-5) 	
<ul style="list-style-type: none"> Case management (0-6) 	
<ul style="list-style-type: none"> Court automation (0-4) 	
<ul style="list-style-type: none"> Alternative dispute resolution (0-3) 	


Enforcing Contracts - Taiwan, China

Standardized Company

Claim value	TWD 1,421,080.00
Court name	Taipei District Court
City Covered	Taipei

Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Time (days)	510	565.7	577.8	164.00 (Singapore)
Cost (% of claim value)	18.3	47.3	21.5	9.00 (Iceland)
Quality of judicial processes index (0-18)	14.0	7.9	11.0	15.50 (Australia)

Figure - Enforcing Contracts in Taiwan, China and comparator economies - Ranking and DTF

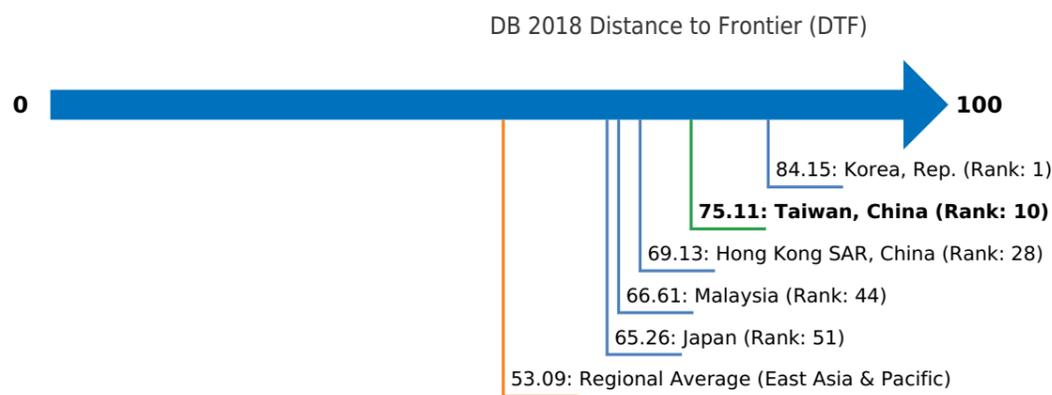

Note: The ranking of economies on the ease of enforcing contracts is determined by sorting their distance to frontier scores for enforcing contracts. These scores are the simple average of the distance to frontier scores for each of the component indicators.

Figure - Enforcing Contracts in Taiwan, China - Time and Cost


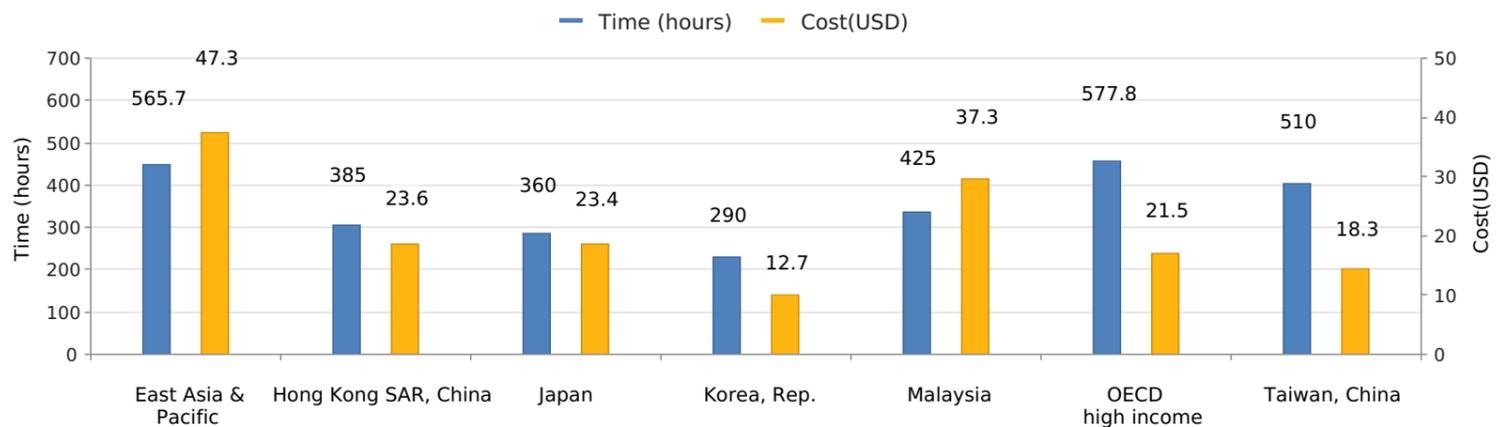


Figure - Enforcing Contracts in Taiwan, China and comparator economies - Measure of Quality

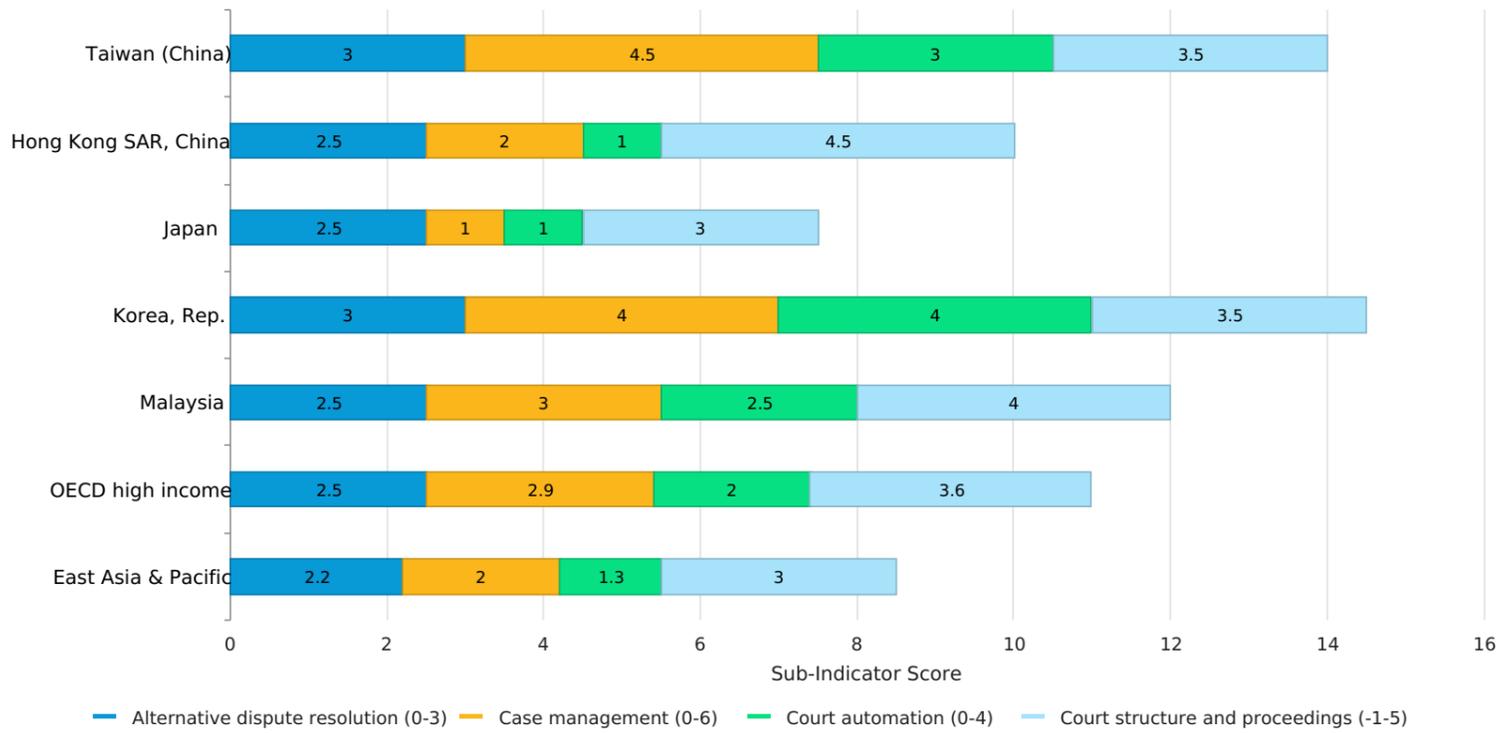

Details - Enforcing Contracts in Taiwan, China

	Indicator
Time (days)	510
Filing and service	30
Trial and judgment	360
Enforcement of judgment	120
Cost (% of claim value)	18.3
Attorney fees	15.5
Court fees	2.6
Enforcement fees	0.2
Quality of judicial processes index (0-18)	14.0
Court structure and proceedings (-1-5)	3.5
Case management (0-6)	4.5
Court automation (0-4)	3.0
Alternative dispute resolution (0-3)	3.0

Details - Enforcing Contracts in Taiwan, China - Measure of Quality

	Answer	Score
Quality of judicial processes index (0-18)		14.0
Court structure and proceedings (-1-5)		3.5
1. Is there a court or division of a court dedicated solely to hearing commercial cases?	No	0.0
2. Small claims court		1.5
2.a. Is there a small claims court or a fast-track procedure for small claims?	Yes	
2.b. If yes, is self-representation allowed?	Yes	
3. Is pretrial attachment available?	Yes	1.0
4. Are new cases assigned randomly to judges?	Yes, automatic	1.0
5. Does a woman's testimony carry the same evidentiary weight in court as a man's?	Yes	0.0
Case management (0-6)		4.5
1. Time standards		0.0
1.a. Are there laws setting overall time standards for key court events in a civil case?	Yes	
1.b. If yes, are the time standards set for at least three court events?	No	
1.c. Are these time standards respected in more than 50% of cases?	Yes	
2. Adjournments		0.5
2.a. Does the law regulate the maximum number of adjournments that can be granted?	No	
2.b. Are adjournments limited to unforeseen and exceptional circumstances?	Yes	
2.c. If rules on adjournments exist, are they respected in more than 50% of cases?	Yes	
3. Can two of the following four reports be generated about the competent court: (i) time to disposition report; (ii) clearance rate report; (iii) age of pending cases report; and (iv) single case progress report?	Yes	1.0
4. Is a pretrial conference among the case management techniques used before the competent court?	Yes	1.0
5. Are there any electronic case management tools in place within the competent court for use by judges?	Yes	1.0
6. Are there any electronic case management tools in place within the competent court for use by lawyers?	Yes	1.0
Court automation (0-4)		3.0
1. Can the initial complaint be filed electronically through a dedicated platform within the competent court?	Yes	1.0
2. Is it possible to carry out service of process electronically for claims filed before the competent court?	No	0.0
3. Can court fees be paid electronically within the competent court?	Yes	1.0
4. Publication of judgments		1.0
4.a. Are judgments rendered in commercial cases at all levels made available to the general public through publication in official gazettes, in newspapers or on the internet or court website?	Yes	
4.b. Are judgments rendered in commercial cases at the appellate and supreme court level made available to the general public through publication in official gazettes, in newspapers or on the internet or court website?	Yes	
Alternative dispute resolution (0-3)		3.0
1. Arbitration		1.5

1.a. Is domestic commercial arbitration governed by a consolidated law or consolidated chapter or section of the applicable code of civil procedure encompassing substantially all its aspects?	Yes	
1.b. Are there any commercial disputes—aside from those that deal with public order or public policy—that cannot be submitted to arbitration?	No	
1.c. Are valid arbitration clauses or agreements usually enforced by the courts?	Yes	
2. Mediation/Conciliation		1.5
2.a. Is voluntary mediation or conciliation available?	Yes	
2.b. Are mediation, conciliation or both governed by a consolidated law or consolidated chapter or section of the applicable code of civil procedure encompassing substantially all their aspects?	Yes	
2.c. Are there financial incentives for parties to attempt mediation or conciliation (i.e., if mediation or conciliation is successful, a refund of court filing fees, income tax credits or the like)?	Yes	

Resolving Insolvency


Doing Business studies the time, cost and outcome of insolvency proceedings involving domestic legal entities. These variables are used to calculate the recovery rate, which is recorded as cents on the dollar recovered by secured creditors through reorganization, liquidation or debt enforcement (foreclosure or receivership) proceedings. To determine the present value of the amount recovered by creditors, *Doing Business* uses the lending rates from the International Monetary Fund, supplemented with data from central banks and the Economist Intelligence Unit.

What the indicators measure	Case study assumptions
<p>Time required to recover debt (years)</p> <p>Measured in calendar years</p> <p>Appeals and requests for extension are included</p>	<p>To make the data on the time, cost and outcome comparable across economies, several assumptions about the business and the case are used:</p>
<p>Cost required to recover debt (% of debtor's estate)</p> <p>Measured as percentage of estate value</p> <p>Court fees</p> <p>Fees of insolvency administrators</p> <p>Lawyers' fees</p> <p>Assessors' and auctioneers' fees</p> <p>Other related fees</p>	<ul style="list-style-type: none"> - A hotel located in the largest city (or cities) has 201 employees and 50 suppliers. The hotel experiences financial difficulties. - The value of the hotel is 100% of the income per capita or the equivalent in local currency of USD 200,000, whichever is greater. - The hotel has a loan from a domestic bank, secured by a mortgage over the hotel's real estate. The hotel cannot pay back the loan, but makes enough money to operate otherwise.
<p>Outcome</p> <p>Whether business continues operating as a going concern or business assets are sold piecemeal</p>	<p>In addition, <i>Doing Business</i> evaluates the adequacy and integrity of the existing legal framework applicable to liquidation and reorganization proceedings through the strength of insolvency framework index. The index tests whether economies adopted internationally accepted good practices in four areas: commencement of proceedings, management of debtor's assets, reorganization proceedings and creditor participation.</p>
<p>Recovery rate for creditors</p> <p>Measures the cents on the dollar recovered by secured creditors</p> <p>Outcome for the business (survival or not) determines the maximum value that can be recovered</p> <p>Official costs of the insolvency proceedings are deducted</p> <p>Depreciation of furniture is taken into account</p> <p>Present value of debt recovered</p>	
<p>Strength of insolvency framework index (0- 16)</p> <p>Sum of the scores of four component indices:</p> <p>Commencement of proceedings index (0-3)</p> <p>Management of debtor's assets index (0-6)</p> <p>Reorganization proceedings index (0-3)</p> <p>Creditor participation index (0-4)</p>	

Resolving Insolvency - Taiwan, China

Indicator	Taiwan, China	East Asia & Pacific	OECD high income	Overall Best Performer
Recovery rate (cents on the dollar)	82.2	35.4	71.2	93.1 (Norway)
Time (years)	1.9	2.6	1.7	0.4 (Ireland)
Cost (% of estate)	4.0	20.6	9.1	1.00 (Norway)
Outcome (0 as piecemeal sale and 1 as going concern)	1
Strength of insolvency framework index (0-16)	11.0	7.0	12.1	15.00 (6 Economies)

Figure - Resolving Insolvency in Taiwan, China and comparator economies - Ranking and DTF

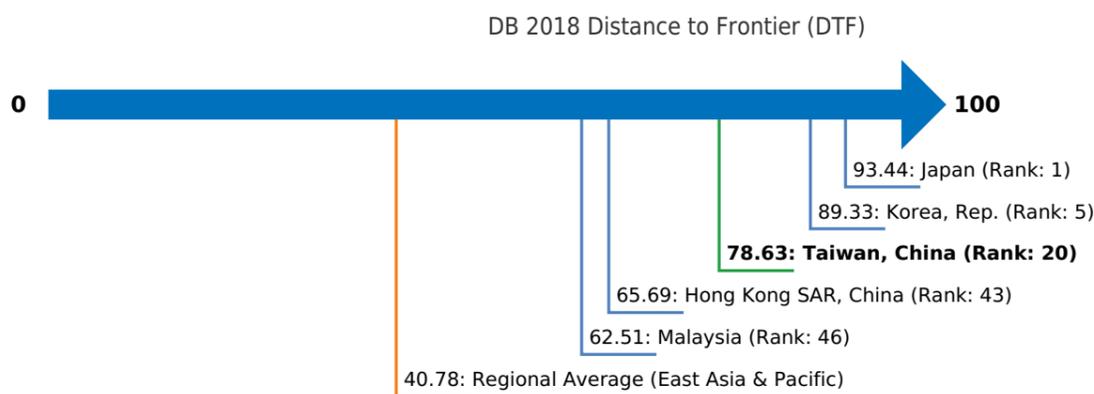

Note: The ranking of economies on the ease of resolving insolvency is determined by sorting their distance to frontier scores for resolving insolvency. These scores are the simple average of the distance to frontier scores for the recovery rate and the strength of insolvency framework index.

Figure - Resolving Insolvency in Taiwan, China - Time and Cost

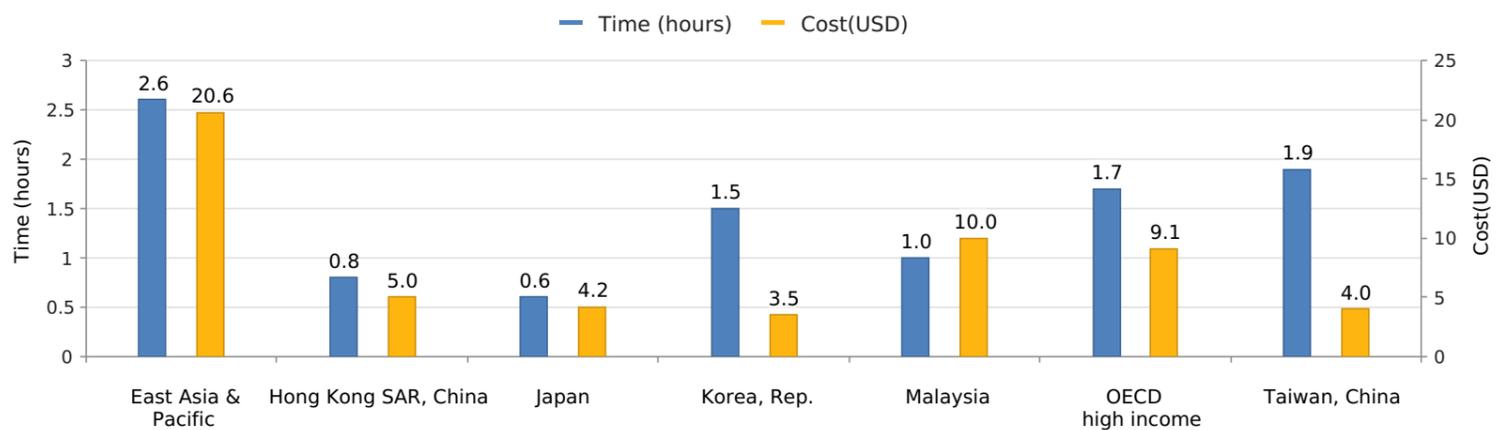


Figure - Resolving Insolvency in Taiwan, China and comparator economies - Measure of Quality


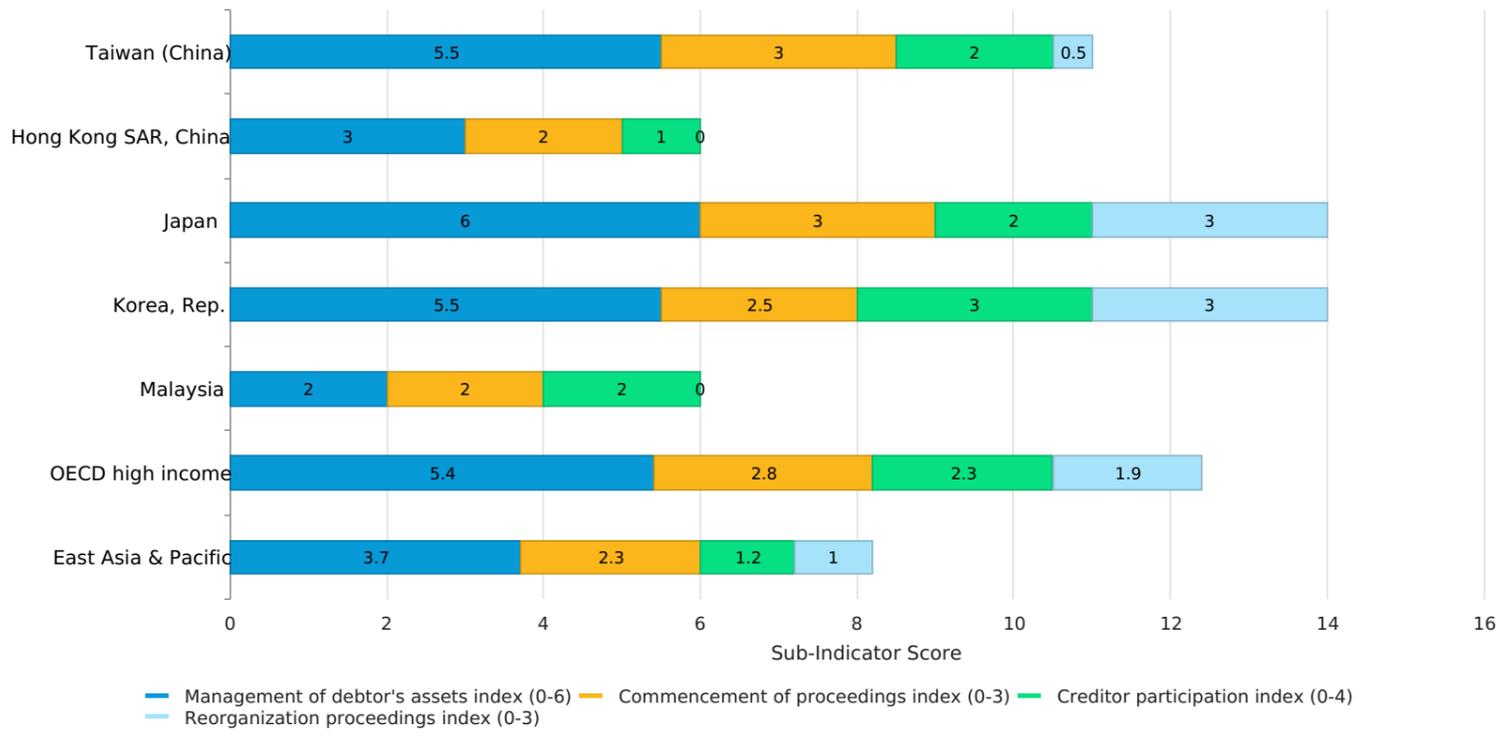


Figure - Resolving Insolvency in Taiwan, China and comparator economies - Recovery Rate

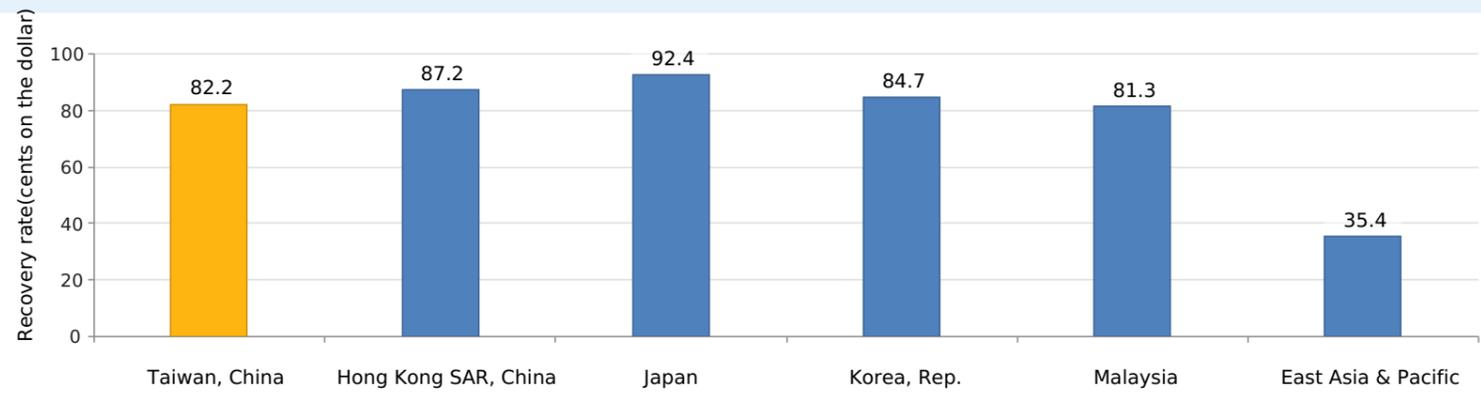

Details - Resolving Insolvency in Taiwan, China

Indicator	Answer	Score
Recovery rate (cents on the dollar)		82.2
Proceeding	reorganization	Mirage management will initiate reorganization as this is consistent with management's intent to keep the business operating and would also maximize the value of the asset from the perspective of BizBank.
Outcome	going concern	The hotel will continue operating as a going concern after the reorganization plan is approved by creditors.
Time (in years)	1.9	The reorganization proceeding until the reorganization plan is approved by creditors takes approximate 1.9 years. After Mirage filing the reorganization petition at Taipei District Court, the Court reviews the material, accepts Mirage case for consideration and appoints administrator usually in half a year. The insolvency administrator is responsible for finalizing creditors' claims and holding the creditor's meeting, which takes about an additional 2 months. In the meantime, Mirage's management would prepare the reorganization plan and in practice it takes about 1 year to get the reorganization plan approved.
Cost (% of estate)	4.0	The costs associated with the case would amount to approximately 4% of the value of the debtor's estate. Cost incurred during the entire insolvency process mainly include attorney fees (1.5%), insolvency representative or receiver fees (1-2%), fees of accountants, assessors, inspectors and other professionals (1%), and other fees (up to 0,5%).

Details - Resolving Insolvency in Taiwan, China - Measure of Quality

	Answer	Score
Strength of insolvency framework index (0-16)		11.0
Commencement of proceedings index (0-3)		3.0
What procedures are available to a DEBTOR when commencing insolvency proceedings?	(a) Debtor may file for both liquidation and reorganization	1.0
Does the insolvency framework allow a CREDITOR to file for insolvency of the debtor?	(a) Yes, a creditor may file for both liquidation and reorganization	1.0
What basis for commencement of the insolvency proceedings is allowed under the insolvency framework?	(a) Debtor is generally unable to pay its debts as they mature	1.0
Management of debtor's assets index (0-6)		5.5
Does the insolvency framework allow the continuation of contracts supplying essential goods and services to the debtor?	Yes	1.0
Does the insolvency framework allow the rejection by the debtor of overly burdensome contracts?	Yes	1.0
Does the insolvency framework allow avoidance of preferential transactions?	Yes	1.0
Does the insolvency framework allow avoidance of undervalued transactions?	Yes	1.0
Does the insolvency framework provide for the possibility of the debtor obtaining credit after commencement of insolvency proceedings?	Yes	1.0
Does the insolvency framework assign priority to post-commencement credit?	(a) Yes over all pre-commencement creditors, secured or unsecured	0.5
Reorganization proceedings index (0-3)		0.5
Which creditors vote on the proposed reorganization plan?	(a) All creditors	0.5
Does the insolvency framework require that dissenting creditors in reorganization receive at least as much as what they would obtain in a liquidation?	No	0.0
Are the creditors divided into classes for the purposes of voting on the reorganization plan, does each class vote separately and are creditors in the same class treated equally?	No	0.0
Creditor participation index (0-4)		2.0
Does the insolvency framework require approval by the creditors for selection or appointment of the insolvency representative?	No	0.0
Does the insolvency framework require approval by the creditors for sale of substantial assets of the debtor?	No	0.0
Does the insolvency framework provide that a creditor has the right to request information from the insolvency representative?	Yes	1.0
Does the insolvency framework provide that a creditor has the right to object to decisions accepting or rejecting creditors' claims?	Yes	1.0

Note: Even if the economy's legal framework includes provisions related to insolvency proceedings (liquidation or reorganization), the economy receives 0 points for the strength of insolvency framework index, if time, cost and outcome indicators are recorded as "no practice".

Labor Market Regulation

Doing Business presents the data for the labor market regulation indicators in an annex. The report does not present rankings of economies on these indicators or include the topic in the aggregate distance to frontier score or ranking on the ease of doing business. Detailed data collected on labor market regulation are available on the Doing Business website ([//www.doingbusiness.org/data/exploretopics/labor-market-regulation](http://www.doingbusiness.org/data/exploretopics/labor-market-regulation)).

The most recent round of data collection was completed in June 2017. [See the methodology for more information.](#)

What the indicators measure

Hiring

(i) whether fixed-term contracts are prohibited for permanent tasks; (ii) maximum cumulative duration of fixed-term contracts; (iii) length of the probationary period; (iv) minimum wage.

Working hours

(i) maximum number of working days allowed per week; (ii) premiums for work: at night, on a weekly rest day and overtime; (iii) whether there are restrictions on work at night, work on a weekly rest day and for overtime work; (iv) whether nonpregnant and nonnursing women can work same night hours as men; (v) length of paid annual leave.

Redundancy rules

(i) whether redundancy can be basis for terminating workers; (ii) whether employer needs to notify and/or get approval from third party to terminate 1 redundant worker and a group of 9 redundant workers; (iii) whether law requires employer to reassign or retrain a worker before making worker redundant; (iv) whether priority rules apply for redundancies and reemployment.

Redundancy cost

(i) notice period for redundancy dismissal; (ii) severance payments due when terminating a redundant worker.

Job quality

(i) whether law mandates equal remuneration for work of equal value and nondiscrimination based on gender in hiring; (ii) whether law mandates paid or unpaid maternity leave; (iii) length of paid maternity leave; (iv) whether employees on maternity leave receive 100% of wages; (v) availability of five fully paid days of sick leave a year; (vi) eligibility requirements for unemployment protection.

Case study assumptions

To make the data comparable across economies, several assumptions about the worker and the business are used.

The worker:

- Is a cashier in a supermarket or grocery store, age 19, with one year of work experience.
- Is a full-time employee.
- Is not a member of the labor union, unless membership is mandatory.

The business:

- Is a limited liability company (or the equivalent in the economy).
- Operates a supermarket or grocery store in the economy's largest business city. For 11 economies the data are also collected for the second largest business city.
- Has 60 employees.
- Is subject to collective bargaining agreements if such agreements cover more than 50% of the food retail sector and they apply even to firms that are not party to them.
- Abides by every law and regulation but does not grant workers more benefits than those mandated by law, regulation or (if applicable) collective bargaining agreements.

Labor Market Regulation - Taiwan, China

Details - Labor Market Regulation in Taiwan, China

	Answer
Hiring	
Fixed-term contracts prohibited for permanent tasks?	Yes
Maximum length of a single fixed-term contract (months)	No limit
Maximum length of fixed-term contracts, including renewals (months)	No limit
Minimum wage applicable to the worker assumed in the case study (US\$/month)	649.8
Ratio of minimum wage to value added per worker	0.2
Maximum length of probationary period (months)	n.a.
Working hours	
Standard workday	8.0
Maximum number of working days per week	6.0
Premium for night work (% of hourly pay)	0.0
Premium for work on weekly rest day (% of hourly pay)	100.0
Premium for overtime work (% of hourly pay)	33.0
Restrictions on night work?	No
Whether nonpregnant and nonnursing women can work the same night hours as men	Yes
Restrictions on weekly holiday?	No
Restrictions on overtime work?	No
Paid annual leave for a worker with 1 year of tenure (working days)	7.0
Paid annual leave for a worker with 5 years of tenure (working days)	15.0
Paid annual leave for a worker with 10 years of tenure (working days)	16.0
Paid annual leave (average for workers with 1, 5 and 10 years of tenure, in working days)	12.7
Redundancy rules	
Dismissal due to redundancy allowed by law?	Yes
Third-party notification if one worker is dismissed?	Yes
Third-party approval if one worker is dismissed?	No
Third-party notification if nine workers are dismissed?	Yes
Third-party approval if nine workers are dismissed?	No
Retraining or reassignment obligation before redundancy?	Yes
Priority rules for redundancies?	No
Priority rules for reemployment?	Yes
Redundancy cost	
Notice period for redundancy dismissal for a worker with 1 year of tenure	2.9
Notice period for redundancy dismissal for a worker with 5 years of tenure	4.3
Notice period for redundancy dismissal for a worker with 10 years of tenure	4.3
Notice period for redundancy dismissal (average for workers with 1, 5 and 10 years of tenure)	3.8
Severance pay for redundancy dismissal for a worker with 1 year of tenure	2.2

Severance pay for redundancy dismissal for a worker with 5 years of tenure	10.8
Severance pay for redundancy dismissal for a worker with 10 years of tenure	21.7
Severance pay for redundancy dismissal (average for workers with 1, 5 and 10 years of tenure)	11.6
Job quality	
Equal remuneration for work of equal value?	Yes
Gender nondiscrimination in hiring?	Yes
Paid or unpaid maternity leave mandated by law?	Yes
Minimum length of maternity leave (calendar days)?	56.0
Receive 100% of wages on maternity leave?	Yes
Five fully paid days of sick leave a year?	No
Unemployment protection after one year of employment?	Yes
Minimum contribution period for unemployment protection (months)?	12.0

Business Reforms in Taiwan, China

In the year ending June 1, 2017, 119 economies implemented 264 total reforms across the different areas measured by Doing Business. Doing Business has recorded more than 2,900 regulatory reforms making it easier to do business since 2004. Reforms inspired by Doing Business have been implemented by economies in all regions. The following are the reforms for India implemented since Doing Business 2008.

✓ = Doing Business reform making it easier to do business. ✗ = Change making it more difficult to do business.

DB2018

✓ **Trading across Borders:** Taiwan, China made exporting easier by allowing different organizations to electronically issue certificates of origin.

✓ **Enforcing Contracts:** Taiwan, China, made enforcing contracts easier by introducing an electronic filing system.

Labor Market Regulation: Taiwan, China, adopted legislation that increased the number of mandatory paid annual leave days and the number of weekly rest days.

DB2016

✓ **Getting Electricity:** The utility in Taiwan, China, reduced the time required for getting an electricity connection through a simplified procedure for obtaining excavation permits from the municipality.

DB2015

✓ **Getting Electricity:** Taiwan, China, made getting electricity easier by eliminating site inspections.

✓ **Getting Credit:** Taiwan, China, improved access to credit information by beginning to include data from utility companies in credit reports.

✓ **Paying Taxes:** Taiwan, China, made paying taxes easier for companies by introducing an electronic system for paying the vehicle license tax.

DB2013

✓ **Dealing with Construction Permits:** Taiwan, China, made dealing with construction permits easier by introducing a risk-based and self-regulatory inspection system and improving operational features of the one-stop shop for building permits.

✓ **Protecting Minority Investors:** Taiwan, China, strengthened investor protections by increasing disclosure requirements for related-party transactions and improving the liability regime for company directors in cases where such transactions are abusive.

DB2012

✓ **Starting a Business:** Taiwan (China) made starting a business easier by implementing an online one-stop shop for business registration.

✓ **Dealing with Construction Permits:** Taiwan (China) made dealing with construction permits easier by creating a one-stop center.

DB2011

✓ **Starting a Business:** Taiwan (China) eased business start-up by reducing the time required to check company names, register retirement plans and apply for health, pension and labor insurance.

✓ **Paying Taxes:** Taiwan (China) reduced the corporate income tax rate and simplified tax return forms, rules for assessing corporate income tax and the calculation of interim tax payments.

DB2010

✓ **Starting a Business:** Taiwan, China, made starting a business easier by abolishing the minimum capital requirement and speeding up various procedures.

✓ **Paying Taxes:** Taiwan, China, made paying taxes easier for companies by extending electronic filing and payment to value added tax.

DB2009

✓ **Getting Credit:** Taiwan, China, strengthened its secured transactions system through an amendment to its civil code allowing the use of personal real estate or property to secure a line of credit, for not more than a specified maximum amount.

Doing Business 2018 is the 15th in a series of annual reports investigating the regulations that enhance business activity and those that constrain it. The report provides quantitative indicators covering 11 areas of the business environment in 190 economies. The goal of the *Doing Business* series is to provide objective data for use by governments in designing sound business regulatory policies and to encourage research on the important dimensions of the regulatory environment for firms.



ISBN 978-1-4648-1146-3



9 781464 811463

SKU 211146

GLOBAL CONTRIBUTORS

ADVOCATES FOR INTERNATIONAL DEVELOPMENT
 AMERICAN BAR ASSOCIATION, SECTION OF INTERNATIONAL LAW
 BAKER & MCKENZIE
 BDO
 DELOITTE
 DENTONS
 DLA PIPER
 EY
 FIABCI, THE INTERNATIONAL REAL ESTATE FEDERATION
 GRANT THORNTON
 GRATA INTERNATIONAL
 IUS LABORIS - ALLIANCE OF LABOR, EMPLOYMENT,
 BENEFITS AND PENSIONS LAW FIRMS
 KPMG
 LAW SOCIETY OF ENGLAND AND WALES
 LEX MUNDI, ASSOCIATION OF INDEPENDENT LAW FIRMS
 PWC¹
 REED SMITH LLP
 RUSSELL BEDFORD INTERNATIONAL
 WHITE & CASE

REGIONAL CONTRIBUTORS

A.P. MOLLER - MAERSK GROUP
 AL TAMIMI & COMPANY
 ARIAS LAW
 ASHURST LLP
 ASSOCIATION OF CONSUMER CREDIT
 INFORMATION SUPPLIERS (ACCIS)
 BOGA & ASSOCIATES
 CENTIL LAW
 DFDL
 ENSAFRICA
 EVERSHEDES SUTHERLAND
 GARCÍA & BODÁN
 JOHN W. FFOOKS & CO.
 LEXINCORP
 MAYER BROWN
 SCHOENHERR
 SORAINEN
 TALAL ABU-GHAZALEH LEGAL (TAG-LEGAL)
 TRANSUNION INTERNATIONAL
 VDA - VIEIRA DE ALMEIDA & ASSOCIADOS

AFGHANISTAN

Taqi Ahmad
 A.F. FERGUSON & CO.,
 CHARTERED ACCOUNTANTS,
 A MEMBER FIRM OF
 PWC NETWORK
 Gloria Ahmadi
 KAKAR ADVOCATS
 Bari Alkozai
 PRAELEGAL
 Shaheryar Aziz
 A.F. FERGUSON & CO.,
 CHARTERED ACCOUNTANTS,
 A MEMBER FIRM OF
 PWC NETWORK
 Mazhar Bangash
 RIAA BARKER GILLETTE AFG

Haidar Barak
 RGM INTERNATIONAL
 GROUP LLC
 Nadia Bazidwal
 THE ASIA FOUNDATION
 Sultan Maqsood Fazel
 QADERDAN ELECTRICITY
 COMPANY
 Hasibullah Ghaforzai
 PRAELEGAL
 Chantal Grut
 ROSENSTOCK LEGAL SERVICES
 Naheed Habibi
 DA AFGHANISTAN BANK
 Khan Hadawal
 DA AFGHANISTAN BANK

Mohammad Afzal Hassanzada
 DA AFGHANISTAN BANK
 Khalid Hatam
 RIAA BARKER GILLETTE AFG
 Saduddin Haziq
 AFGHAN UNITED BANK
 Hussain Ali Hekmat
 IKMAL ENGINEERING
 CONSTRUCTION COMPANY
 Rashid Ibrahim
 A.F. FERGUSON & CO.,
 CHARTERED ACCOUNTANTS,
 A MEMBER FIRM OF
 PWC NETWORK
 Waheed Iqbal
 LEGAL ORACLES
 Sanzar Kakar
 AFGHANISTAN
 HOLDING GROUP
 M. Wissal Khan
 LEGAL ORACLES
 Thomas Kraemer
 KAKAR ADVOCATS
 Khalid Massoudi
 MASNAD LEGAL CONSULTANCY
 Ghulam Reza Mohammady
 KAKAR ADVOCATS
 Saqib Naseer
 A.F. FERGUSON & CO.,
 CHARTERED ACCOUNTANTS,
 A MEMBER FIRM OF
 PWC NETWORK
 Abdul Nasser Nazari
 RAINBOW CONSULTING
 SERVICES
 Tariq Nazarwall
 DEHSABZ CITY DEVELOPMENT
 AUTHORITY, INDEPENDENT
 BOARD OF KABUL NEW
 CITY DEVELOPMENT
 Habibullah Pirzada
 ACCL INTERNATIONAL
 Habiburahman Qaderdan
 QADERDAN ELECTRICITY
 COMPANY
 Shakir Rahimi
 PRAELEGAL
 Tamsil Rashid
 AFGHANISTAN
 INTERNATIONAL BANK
 Irisglyn Rivero
 RGM INTERNATIONAL
 GROUP LLC
 Abdul Wahid Rizwanzai
 RIAA BARKER GILLETTE AFG
 Ali Saberi
 IKMAL ENGINEERING
 CONSTRUCTION COMPANY
 Abdul Sami Sabir
 DA AFGHANISTAN BANK
 Zahid Safi
 RIAA BARKER GILLETTE AFG
 Abdul Nasser Sahak
 DA AFGHANISTAN BANK
 Saeed Shajjan
 SHAJJAN & ASSOCIATES
 Aali Shan Ahmed
 ICON TRADING AND
 FORWARDING COMPANY

Haris Syed Raza
 GERRY'S DNATA PVT. LTD.
 Mohammad Taimur Taimur
 DA AFGHANISTAN BANK
 Roshan Kumar Thapa
 RGM INTERNATIONAL
 GROUP LLC
 Madan Upadhyay
 RGM INTERNATIONAL
 GROUP LLC
 Najibullah Wardak
 MINISTRY OF FINANCE
 Maseeh Ahmad Wassil
 DA AFGHANISTAN BANK
 Rohullah Zarif
 ACCL INTERNATIONAL
ALBANIA
 WOLF THEISS
 Anjola Aliaj
 OPTIMA LEGAL
 AND FINANCIAL
 Artur Asllani
 TONUCCI & PARTNERS
 Artan Babarano
 GENERAL DIRECTORATE
 OF TAXATION
 Sabina Baboci
 KALO & ASSOCIATES
 Eglantina Bakiu Lala
 BITRI & BAKIU LAW FIRM
 Ledia Beçi
 HOXHA, MEMI & HOXHA
 Renis Bega
 HOXHA, MEMI & HOXHA
 Boiken Bendo
 BENDO LAW, ADVOCATES
 & LEGAL CONSULTANTS
 Jona Bica
 EY
 Artan Bozo
 BOZO & ASSOCIATES
 LAW FIRM
 Njazuela Braholli
 GJIKO & ASSOCIATES
 Irma Cacaj
 BOGA & ASSOCIATES
 Doris Carcani
 ALBANIAN ENERGY
 REGULATOR (ERE)
 Megi Caushi
 AVANNITVE CONSULTING
 SH.P.K.
 Rozana Çelmeta
 GENERAL DIRECTORATE
 OF TAXATION
 Ilir Daci
 OPTIMA LEGAL
 AND FINANCIAL
 Besnik Duraj
 DRAKOPOULOS LAW FIRM
 Ana Dylgjieri
 BANK OF ALBANIA
 Sokol Elmazaj
 BOGA & ASSOCIATES
 Dorina Fezollari
 AVANNITVE CONSULTING
 SH.P.K.

Lorena Gega
 PRICEWATERHOUSECOOPERS
 AUDIT SH.P.K.
 Enida Gerxholli
 REGISTRY OF SECURITY
 PLEDGES
 Gjergji Gjika
 GJIKO & ASSOCIATES
 Valbona Gjonçari
 BOGA & ASSOCIATES
 Shirli Gorenca
 KALO & ASSOCIATES
 Bojana Hajdini
 DRAKOPOULOS LAW FIRM
 Esa Hala
 TONUCCI & PARTNERS
 Ergys Hasani
 GJIKO & ASSOCIATES
 Shpati Hoxha
 HOXHA, MEMI & HOXHA
 Elira Hroni
 KALO & ASSOCIATES
 Evis Jani
 GJIKO & ASSOCIATES
 Brunilda Jegeni
 REGISTRY OF SECURITY
 PLEDGES
 Ilir Johollari
 HOXHA, MEMI & HOXHA
 Bledar Kabashi
 MINISTRY OF JUSTICE
 Neritan Kallfa
 TONUCCI & PARTNERS
 Miranda Kapllani
 BENIMPEX & CO.
 Olta Kaziaj
 AVANNITVE CONSULTING
 SH.P.K.
 Migena Kolonja
 BOGA & ASSOCIATES
 Rudi Laze
 BOZO & ASSOCIATES
 LAW FIRM
 Gilda Lika
 BENDO LAW, ADVOCATES
 & LEGAL CONSULTANTS
 Petraq Lika
 OSHEE (OPERATORI
 I SHPERNDARJES SE
 ENERGIJE ELEKTRIKE)
 Arbër Lloshi
 OPTIMA LEGAL
 AND FINANCIAL
 Tetis Lubonja
 MINISTRY OF JUSTICE
 Rezarta Mataj
 TIRANA DISTRICT COURT
 Andi Memi
 HOXHA, MEMI & HOXHA
 Eglon Metalia
 EY
 Naim Mete
 GENERAL DIRECTORATE
 OF TAXATION
 Aigest Milo
 KALO & ASSOCIATES
 Orgita Milo
 BOGA & ASSOCIATES

1. "PwC" refers to the network of member firms of PricewaterhouseCoopers International Limited (PwCIL), or, as the context requires, individual member firms of the PwC network. Each member firm is a separate legal entity and does not act as agent of PwCIL or any other member firm. PwCIL does not provide any services to clients. PwCIL is not responsible or liable for the acts or omissions of any of its member firms nor can it control the exercise of their professional judgment or bind them in any way. No member firm is responsible or liable for the acts or omissions of any other member firm nor can it control the exercise of another member firm's professional judgment or bind another member firm or PwCIL in any way.

Suzanne Eckert
WENGER PLATTNER

Jana Essebier
VISCHER AG

Robert Furter
PESTALOZZI, MEMBER
OF LEX MUNDI

Gaudenz Geiger
STAIGER ATTORNEYS-
AT-LAW LTD.

Riccardo Geiser
ALTENBURGER LTD.
LEGAL + TAX

Matthias Giger
CEVA LOGISTICS

Olivier Hari
SCHELLENBERG WITTMER LTD.

Thomas H. Henle
IL INDUSTRIE-LEASING LTD.

Anouk Hirt
BAR & KARRER AG

Ani Homberger
LALIVE

David Jenny
VISCHER AG

L. Mattias Johnson
FRORIEP LEGAL AG

Cyrril Kaeser
LENZ & STAEHELIN

Michael Kramer
PESTALOZZI, MEMBER
OF LEX MUNDI

Cédric Lenoir
LALIVE

Beat Luescher
AZ ELEKTRO AG

Valerie Meyer Bahar
NIEDERER KRAFT & FREY AG

Kaisa Miller
EY

Andrea Molino
MAG LEGIS SA

Konrad Moor
BÜRGI NÄGELI LAWYERS

Marco Mühlemann
EY

Angela Oppliger
VISCHER AG

Daniela Reinhardt
PWC SWITZERLAND

Alexander Reus
DIAZ REUS & TARG LLP

Roman Rinderknecht
EY

Ueli Schindler
AECOMI/URS

Daniel Schmitz
PWC SWITZERLAND

Corinne Studer
HANDELSREGISTERAMT
DES KANTONS

Jean-Paul Vulliéty
LALIVE

Patrick Weber
EKZ ELEKTRIZITÄTSWERKE
DES KANTONS ZÜRICH

Stefan Zangger
BELGLOBE INTERNATIONAL LLC

Marc Zimmermann
LENZ & STAEHELIN

SYRIAN ARAB REPUBLIC
EY

Alaa Ahmad
SYRIAN STRATEGIC THINK
TANK RESEARCH CENTER

Sadi Alkhouri
KPMG SYRIA

Serene Almaleh
SULTANS LAW

Layla Alsamman
DELOITTE SYRIA

Jamil Ammar
RUTGERS LAW SCHOOL

Ghada Armali
SARKIS & ASSOCIATES

Reem Awad
COMMERCE & ENGINEERING
CONSULTANTS

Mohammad Khaled
Darwicheh
TALAL ABU-GHAZALEH
LEGAL (TAG-LEGAL)

Richard El Mouallem
PWC LEBANON

Nada Elsayed
PWC LEBANON

Anas Ghazi
MEETHAK - LAWYERS
& CONSULTANTS

Gordon Gray
NATIONAL U.S.-ARAB
CHAMBER OF COMMERCE

Fadi Kardoos
KARDOOS LAW OFFICE

Mamon Katbeh
CENTRAL BANK OF SYRIA

Hussein Khaddour
SYRIAN LEGAL BUREAU

Alaa Nizam
ALAA NIZAM LAW OFFICE

Gabriel Oussi
OUSSI LAW FIRM

Fadi Sarkis
SARKIS & ASSOCIATES

Arem Taweel
EBRAHEEM TAWHEEL
LAW OFFICE

Ebraheem Taweel
EBRAHEEM TAWHEEL
LAW OFFICE

TAIWAN, CHINA

Jack Chang
YANGMING PARTNERS

Kuo-Ming Chang
JOINT CREDIT
INFORMATION CENTER

Sur-Form Chang
ACER INCORPORATED

Victor Chang
LCS & PARTNERS

Christine Chen
WINKLER PARTNERS

Daniel Chen
WINKLER PARTNERS

Edgar Y. Chen
TSAR & TSAI LAW FIRM,
MEMBER OF LEX MUNDI

Emily Chen
LCS & PARTNERS

Nicholas V. Chen
PAMIR LAW GROUP

Romy Chen
NATIONAL DEVELOPMENT
COUNCIL

Ying-Hua Chen
TAIWAN STOCK EXCHANGE

Yo-Yi Chen
FORMOSA TRANSNATIONAL

Chun-Yih Cheng
FORMOSA TRANSNATIONAL

Cathy Chin
TAIWAN INTERNATIONAL
LOGISTICS & SUPPLY
CHAIN ASSOCIATION

May Chou
APL

Philip T. C. Fei
FEI & CHENG ASSOCIATES

Mark Harty
LCS & PARTNERS

Sophia Hsieh
TSAR & TSAI LAW FIRM,
MEMBER OF LEX MUNDI

Chin-Yun Hsu
SECURITIES AND FUTURES
BUREAU, FINANCIAL
SUPERVISORY COMMISSION

Robert Hsu
BOLLORÉ LOGISTICS
TAIWAN LTD.

Jamie Huang
HUANG & PARTNERS

Margaret Huang
LCS & PARTNERS

T.C. Huang
HUANG & PARTNERS

Charles Hwang
YANGMING PARTNERS

Gloria Juan
YANGMING PARTNERS

Jung-Chang Lai
TAIPEI CITY GOVERNMENT

Wei-Ping Lai
YU-DING LAW FIRM

En-Fong Lan
PRIMORDIAL LAW FIRM

Jenny Lee
PAMIR LAW GROUP

Max Lee
TSAR & TSAI LAW FIRM,
MEMBER OF LEX MUNDI

Vivian Lee
HUANG & PARTNERS

John Li
LCS & PARTNERS

Justin Liang
BAKER & MCKENZIE

Angela Lin
LEXCEL PARTNERS

Frank Lin
REXMED INDUSTRIES CO. LTD.

Jeffrey Lin
JOINT CREDIT
INFORMATION CENTER

Kien Lin
JOINT CREDIT
INFORMATION CENTER

Lilian Lin
FINANCIAL SUPERVISORY
COMMISSION,
BANKING BUREAU

Ming-Yen Lin
DEEP & FAR,
ATTORNEYS-AT-LAW

Nelson J. Lin
HUANG & PARTNERS

Rich Lin
LCS & PARTNERS

Sheau Chyng Lin
PRIMORDIAL LAW FIRM

Tien-Tsai Lin
NATIONAL CUSTOMS BROKERS
ASSOCIATION OF ROC

Veronica Lin
EIGER

You-Jing Lin
CHI-SHENG LAW FIRM

Julia Liu
BOLLORÉ LOGISTICS
TAIWAN LTD.

Kang-Shen Liu
LEXCEL PARTNERS

Shu-Ying Liu
MINISTRY OF
ECONOMIC AFFAIRS

Wanyi Liu
FINANCIAL SUPERVISORY
COMMISSION,
BANKING BUREAU

Stacy Lo
LEXCEL PARTNERS

Alice Lu
LCS & PARTNERS

Judy Lu
LEE AND LI,
ATTORNEYS-AT-LAW

Wan-Chu Lu
MINISTRY OF INTERIOR

Joseph Ni
GOOD EARTH CPA

Patrick Pai-Chiang Chu
LEE AND LI,
ATTORNEYS-AT-LAW

Shiaw-Der Pan
MOTC

Lloyd Roberts
EIGER

Ching-Ping Shao
NATIONAL TAIWAN UNIVERSITY

Scarlett Tang
TSAR & TSAI LAW FIRM,
MEMBER OF LEX MUNDI

Tanya Y. Teng
HUANG & PARTNERS

Bee Leay Teo
BAKER & MCKENZIE

David Tien
LEE AND LI,
ATTORNEYS-AT-LAW

C.F. Tsai
DEEP & FAR,
ATTORNEYS-AT-LAW

Chiun-Yi Tsai
MINISTRY OF
ECONOMIC AFFAIRS

David Tsai
LEXCEL PARTNERS

Rita Tsai
APL

Yu-ti Tsai
WINKLER PARTNERS

Huan-Kai Tseng
PWC TAIWAN

Vivian W. Chen
PWC TAIWAN

Antoine Wang
TBBC LTD.

Felix Yifan Wang
YANGMING PARTNERS

Richard Watanabe
PWC TAIWAN

Huang William
GIBSIN ELECTRICAL
CONSULTANCY

Chun-Feng Wu
TAIWAN INTERNATIONAL
PORTS CORP. LTD.

Ja-Lin Wu
NATIONAL DEVELOPMENT
COUNCIL

Pei-Yu Wu
BAKER & MCKENZIE

Yen-yi Wu
WINKLER PARTNERS

Alex Yeh
LCS & PARTNERS

TAJKISTAN

AITEN CONSULTING GROUP

ASSOCIATION OF BANKS
OF TAJIKISTAN

BAKER TILLY TAJIKISTAN

Bakhtiyor Abdulloev
ABM TRANS SERVICE LLC

Manuchehr Abdusamadzoda
CIBT - CREDIT INFORMATION
BUREAU IN TAJIKISTAN

Zarrina Adham
CISC MDO HUMO

Zulfiya Akchurina
GRATA INTERNATIONAL

Ilhom Amirhonov
ABM TRANS SERVICE LLC

Dzhamshed Asrorov
CISC MDO HUMO

Gulanor Atobek
DELOITTE & TOUCHE LLC

Amirbek Azizov
MINISTRY OF LABOR,
MIGRATION AND EMPLOYMENT
OF POPULATION

Denis Bagrov
CENTIL LAW FIRM

Abdulbori Baybabaev
LAW FIRM LEX

Petar Chakarov
HEALY CONSULTANTS
GROUP PLC

Akhror Edgarov
CISC MDO HUMO

Manvel Harutyunyan
GRANT THORNTON LLP

Elena Kaeva
PWC KAZAKHSTAN

Assel Khamzina
PWC KAZAKHSTAN

Alisher Khoshimov
CENTIL LAW FIRM

Khurshed Mirziyoev
TAX COMMITTEE UNDER
GOVERNMENT OF THE
REPUBLIC OF TAJIKISTAN

Kamoliddin Mukhamedov
GRATA INTERNATIONAL

Rustam Nazrisho
NAZRISHO & MIRZOEV
LAW FIRM LLC

Temirlan Nildibayev
PWC KAZAKHSTAN

Ganchina Nuralieva
CENTIL LAW FIRM

Bahodur Nurov
GRATA INTERNATIONAL

Anjelika Pazdnyakova
GRANT THORNTON LLP

Faizali Rajabov
ASSOCIATION OF
CONSTRUCTORS OF TAJIKISTAN